




CONTRAST

L I G H T I N G M.L. INC.

"IS" SERIES INSTRUCTIONS FOR INSTALLING "IS" SERIES

- TURN OFF ELECTRIC CURRENT UNTIL COMPLETELY INSTALLED.
- Remove the pot from the Insulated Box for installation in step 8.
- Fasten mounting frame to wood joist (or other ceiling type) with adjustable mounting bars.
- Open junction box and wire to supply leads; connect ground wire and close box. It is important to leave at least 10" of supply leads and ground wire inside the junction box.
- Remove the pot, and close the ceiling.
- Identify the position of the fixtures centered with the opening of the mounting frame; make openings in ceiling:

For model of serie	2000	cut a Ø	108 mm	4.250"
For model of serie	2550	cut a Ø	95 mm	3.750"
For model of serie	2575	cut a Ø	117 mm	4.625"
For model of serie	2675	cut a Ø	117 mm	4.625"
For model of serie	3000	cut a Ø	95 mm	3.750"
For model of serie	3600	cut a Ø	95 mm	3.750"
For model of serie	4000	cut a Ø	84 mm	3.312"
For model of serie	7000	cut a Ø	109 mm	4.312"
- For models 12 V, quick connect the double and triple connectors; for models 120 V, quick connect the tripple connector.
- Insert pot into mounting frame, fix brackets into slides located on both sides of pot, and secure fixture to ceiling with the two (2) adjusting screws.
- Insert lamp and trim in suggested order.
- Option: vapour barriers and/or gaskets are available. See your CONTRAST LIGHTING distributor.

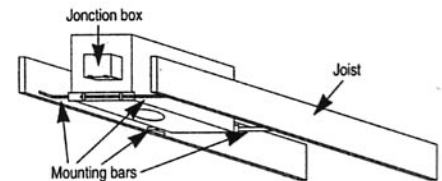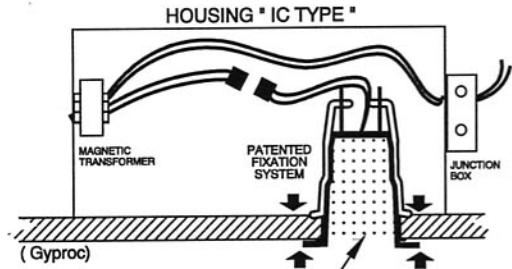

MR16

A) Lamp
B) Glass
C) Trim

A)
B)

(1) ISMR 2000 : T2000 T2000V T2010V R2000
R2000VSM/ST R2010VSM/ST
R2030VSM/ST

(2) ISMR 3000 : T3000 T3100 T3200 T3250
T3260 T3300 T3400 T3450
T3500 T3600 T3650 T3700
T3800 T3850 T3900
S3400 S3450 S3500
S3400D S3450D S3500D
T3400DSM/DST T3450DSM/DST
T3500DSM/DST

(3) ISMR 4000 : T4000 T4200 T4200V T4210V
T4300

(4) ISMR 7000 : T7024 T7025

PAR20-50W

2000, 2550
and 3600 series
2000D serie

A) Lamp
B) Trim

A)

A) Fix lamp into trim
B) Insert trim

B) (3) ISCA 2000 : A2000 A2000V A2010V
A2400S A2450S

(4) ISCA 2000-D : D2000

(5) ISCA 2550 : C2550 BAF2550

(6) ISCA 3600 : A3600 A3600V A3610V
A3700 A3700V A3710V
B3600

PAR30-75W

A) Lamp
B) Trim

A)

B) (7) ISCA 2575 : C2575
BAF2575

(8) ISCA 2675 : B2675

IMPORTANT : The use of other company's (non-Contrast) products or components (ie trims, Lamp Shade) in conjunction with Contrast products may not be covered by cULus and cCSAus approvals, and could be hazardous. Such use automatically voids all Contrast warranty and responsibility from any problems it may occur.

Please keep these instructions for maintenance reference

SUITABLE FOR DAMP LOCATIONS



WARRANTY: CONTRAST LIGHTING guarantees the transformer and components against manufacturing defects for a period of one (1) year, under normal use with proof of purchase. The obligation of the manufacturer consists in the cost of the transformer and components and does not cover the cost of labor and transport for replacement. For all claims, please contact your local supplier.

ATTENTION
THIS FIXTURE IS DESIGNED AND APPROVED FOR USE IN INSULATED CEILING.
WARNING: «RISK OF FIRE»
Most dwellings built before 1985 have supply wires rated 60° C. Consult a qualified Electrician before installing. It is very important not to exceed the lamp wattage indicated.

N.B.: Fixation system (hooks)
Patent # CAN. 2.088.648 / # USA 5.377.088