


CONTRAST TRANSFORMERS

CAT No	POWER	INPUT OUTPUT	W	D	H	UL
TRAM020EC	20VA	120V / 12V	1" 5/8 (41,27 mm)	1" 5/16 (33,33 mm)	1" 5/8 (41,27 mm)	E 177505
TRAM035EC	35VA	120V / 12V	2" 1/16 (52,38 mm)	1" 23/32 (43,65 mm)	1" 3/4 (44,45 mm)	E 177505
TRAM050EC	50VA	120V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM050EC2	50VA	277V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM050EC3	50VA	347V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM075EC	75VA	120V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM075EC2	75VA	277V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM075EC3	75VA	347V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	1" 1/2 (38,10 mm)	E 177505
TRAM100EC	100VA	120V / 12V	2" 1/4 (57,16 mm)	1" 7/8 (47,63 mm)	2" 1/32 (51,60 mm)	E 177505

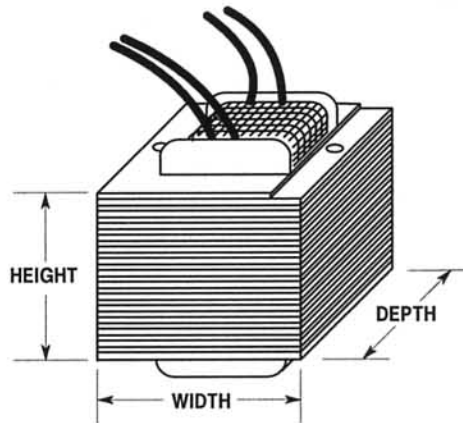

FEATURES FOR CONTRAST TRANSFORMERS

Minimum 94% efficiency and excellent voltage regulation.
10 years limited warranty on Contrast transformers used with Contrast products
 Reliability, Efficiency, Quiet, Dimmable with Low Voltage Magnetic Dimmer

Representative: _____