

NWA4R-NWA4S

4" Series - Ardito


New Construction Housing

Project _____


Notes _____

Fixture type _____





Date _____

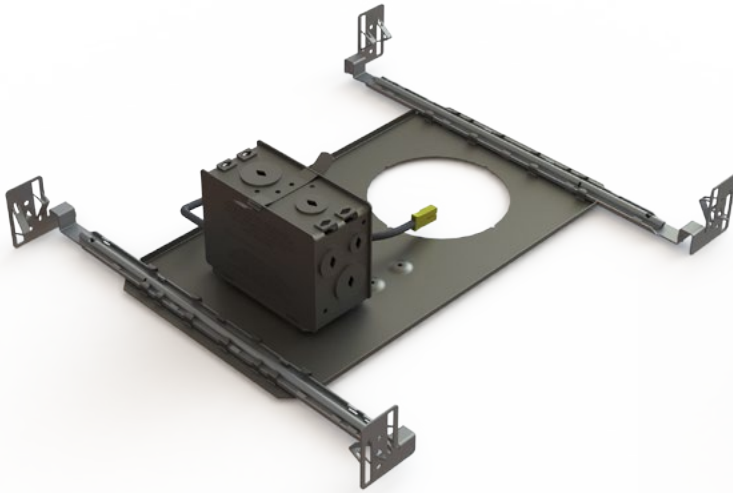

NWA4R (illustrated)

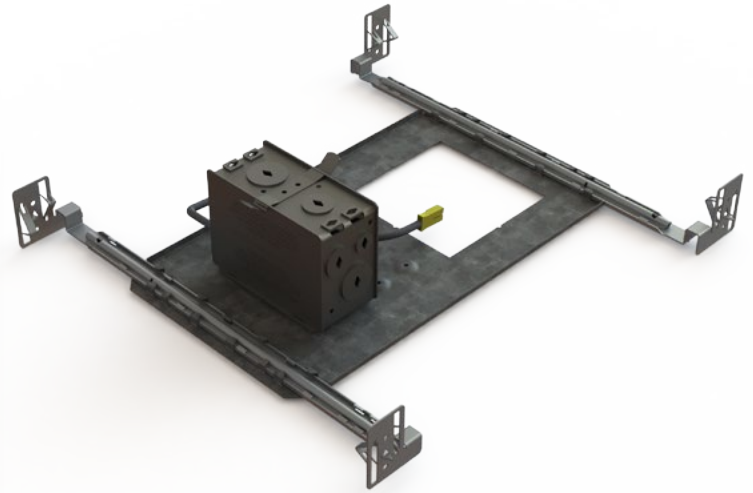

NWA4S (illustrated)

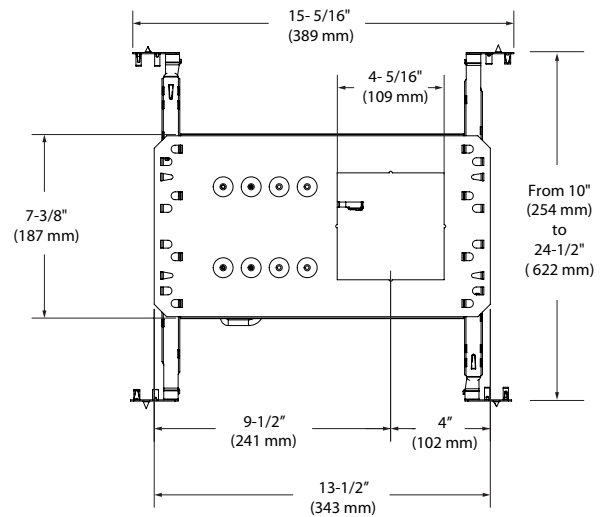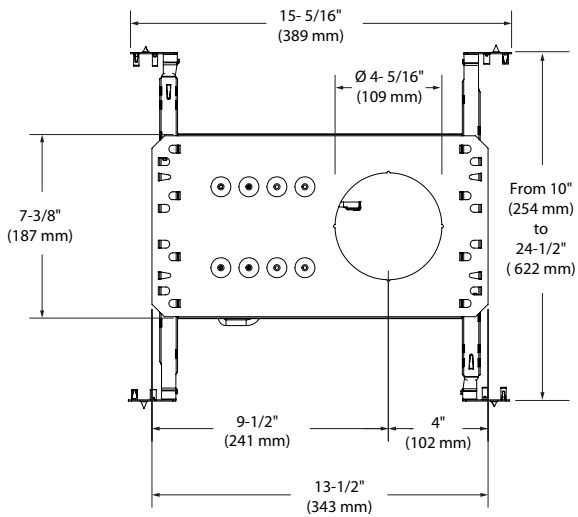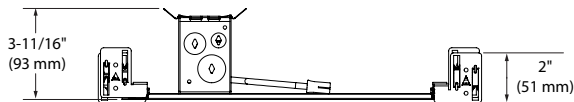

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

NWA4R-NWA4S

4" Series - Ardito

New Construction Housing



SPECIFICATIONS

HOUSING DETAILS	Galvanized steel housing. (0,051" (1,3 mm). Junction box can support up to 10 - 14 gauge wires or 8 - 12 gauge wires (90° wires). Below-ceiling accessible.																																						
MOUNTING	<p>Round Cutout diameter: Ø 4-1/4" (108 mm) Square Cutout diameter: 4-1/4" (108 mm) x 4-1/4" (108 mm)</p> <p>The ceiling level is determined by the choice of trims. Insulation material must be kept at least 3" (76 mm) away from the fixture. Can fit in ceilings up to 1-1/2" (38 mm) thick. Contraste hooks for ease of installation and a perfect fit to ceiling. Mounting bars extend from 10" (254 mm) to 24-1/2" (622 mm) to fit in most ceiling structures.</p>																																						
PERFORMANCE	<p>Performance 1: Up to 1,300 lumens (14W) Performance 2: Up to 1,900 lumens (23W) Lumenetix: Up to 700 lumens (12.5W)</p>																																						
POWER	120V - 277V																																						
DIMMING	<p>2 types of dimming offered:</p> <ul style="list-style-type: none"> • Electronic Low Voltage (ELV) (120V only) • 0-10V (120V only) <p>Due to constant evolution of dimmers we must test them regularly. We invite you to consult frequently our Web site to find our dimmer compatibility list: www.contrastlighting.com</p>																																						
COMPATIBLE TRIMS	<p>NWA4R (round aperture)</p> <table border="1"> <thead> <tr> <th>Performance 1 14W</th> <th>Performance 2 23W</th> <th>Lumenetix CT-WD</th> </tr> </thead> <tbody> <tr><td>A4RFR</td><td>A4RFR</td><td>A4RFR</td></tr> <tr><td>A4RAF</td><td>A4RAF</td><td>A4RAF</td></tr> <tr><td>A4RAR</td><td>A4RAR</td><td>A4RAR</td></tr> <tr><td>A4RWW</td><td>A4RWW</td><td>A4RWW</td></tr> <tr><td>A4RSF</td><td>A4RSF</td><td></td></tr> </tbody> </table>			Performance 1 14W	Performance 2 23W	Lumenetix CT-WD	A4RFR	A4RFR	A4RFR	A4RAF	A4RAF	A4RAF	A4RAR	A4RAR	A4RAR	A4RWW	A4RWW	A4RWW	A4RSF	A4RSF		<p>NWA4S (square aperture)</p> <table border="1"> <thead> <tr> <th>Performance 1 14W</th> <th>Performance 2 23W</th> <th>Lumenetix CT-WD</th> </tr> </thead> <tbody> <tr><td>A4SFR</td><td>A4SFR</td><td>A4SFR</td></tr> <tr><td>A4SAR</td><td>A4SAR</td><td>A4SAR</td></tr> <tr><td>A4SWW</td><td>A4SWW</td><td>A4SWW</td></tr> <tr><td>A4SSF</td><td>A4SSF</td><td></td></tr> </tbody> </table>			Performance 1 14W	Performance 2 23W	Lumenetix CT-WD	A4SFR	A4SFR	A4SFR	A4SAR	A4SAR	A4SAR	A4SWW	A4SWW	A4SWW	A4SSF	A4SSF	
Performance 1 14W	Performance 2 23W	Lumenetix CT-WD																																					
A4RFR	A4RFR	A4RFR																																					
A4RAF	A4RAF	A4RAF																																					
A4RAR	A4RAR	A4RAR																																					
A4RWW	A4RWW	A4RWW																																					
A4RSF	A4RSF																																						
Performance 1 14W	Performance 2 23W	Lumenetix CT-WD																																					
A4SFR	A4SFR	A4SFR																																					
A4SAR	A4SAR	A4SAR																																					
A4SWW	A4SWW	A4SWW																																					
A4SSF	A4SSF																																						
CERTIFICATION	cULus E343977 for damp and wet locations																																						
WARRANTY	5 years on LED driver																																						

CONTRASTE

1009, rue du Parc Industriel
 Lévis (Québec) G6Z 1C5 Canada
 Tel.: 1-888-839-4624
 Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
 All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.


NWA4R-NWA4S

4" Series - Ardito

New Construction Housing



CODIFICATION EXAMPLE





ORDERING CODE

MODEL	SERIES	TYPE OF APERTURE	DRIVER	PERFORMANCE
NWA	4		V	
NWA Ardito New Construction Housing	4 4" Series	R Round S Square	V ELV / 0-10V	1 1,300 lumens 2 1,900 lumens L WD or CT

WD: Warm Dimming
CT: Color Tuning

MUD-IN-PLATE OPTION

Code: MIPA4R (round)
MIPA4S (square)

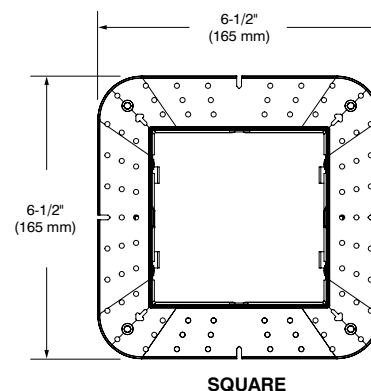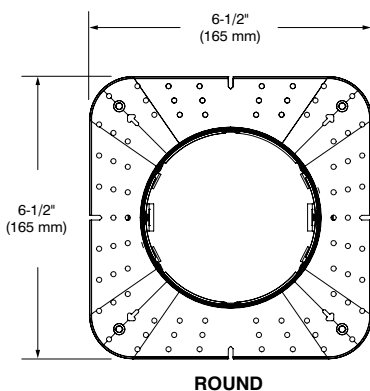

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2017 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.