

# Glass Shade 56


Project \_\_\_\_\_  
 Notes \_\_\_\_\_  
 Fixture Type \_\_\_\_\_  
 Date \_\_\_\_\_

## DESCRIPTION



No matter where it is located, this shape of mouth blown glass of the highest quality guarantees to give out a decorative effect by playing with the light. Endless combinations of shapes, colors and textures allow to create a luminaire adapted to your needs.

## CANOPY SPECIFICATIONS



- CANOPY
- P1 and P2 are made of gauge 20 cold rolled steel.
  - P3, PD1, PDR1, PR1, PR2, PCF3 and PCFR1 are decorative plates made of gauge 14 and 20 cold rolled steel.

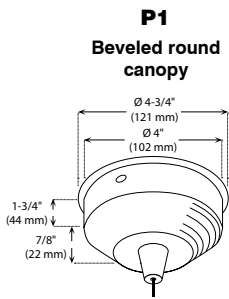



Available in 3 painted colors or 4 plated finishes.

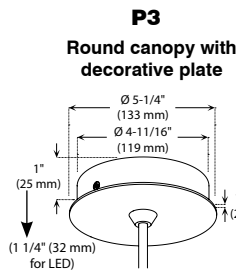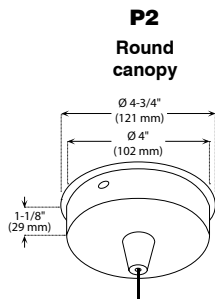


Available in 3 painted colors or 3 plated finishes.

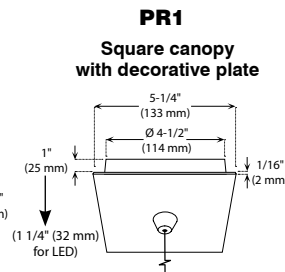


Available in 3 painted colors or 3 plated finishes.

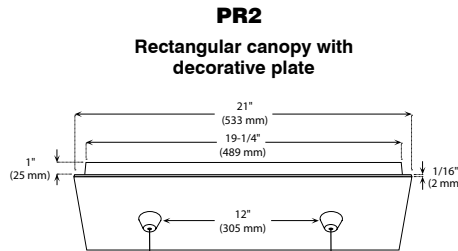

Available in 3 painted colors or 3 plated finishes.

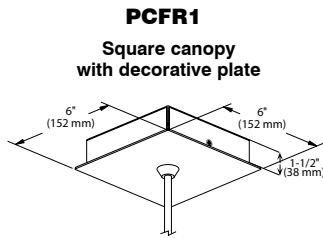

Available in 3 painted colors or 3 plated finishes.

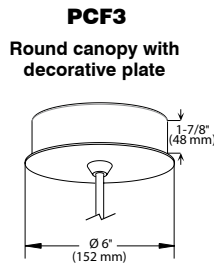

PS5612GCHO (Illustrated)

**INSTALLATION** These canopies fit in 4" (102 mm) junction boxes.

- CABLE AND STEM**
- Cables offered in standard lengths of 6' (1,829 mm). Custom length up to 10' (3,048 mm) for 12V cable and 20' (6,096 mm) for 120V cable (available upon request).
  - 5/16" Steel stems matching the canopy color offered in increments from 6" (152 mm) to 48" (1,219 mm).



# Glass Shade 56

**Complete unit consists of:  
Canopy + Cable/Stem + Suspension System + Shade**

## BI-PIN (GY6.35) AND MR16 SPECIFICATIONS

SOCKET	Universal GY6.35/GX5.3
SOURCE	Low Voltage Halogen Lamps Maximum Wattage: 50W Bi-Pin Lamp (included) Shielded MR16 Lamp (not included)
POWER SUPPLY	120V/12V Electronic converter 277V/12V Electronic converter (available only with Bi-Pin and stem)
DIMMING	Compatible with Electronic Low Voltage (ELV) or Incandescent (TRIAC) dimmers
CERTIFICATION	cULus <b>E172892</b>

## MED/E26 SPECIFICATIONS

SOCKET	Medium Base E26
SOURCE	120V Line Voltage 100W maximum Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Compatible with Incandescent (TRIAC) dimmers
CERTIFICATION	cULus <b>E172892</b>

## G9 SPECIFICATIONS (available only with stem)

SOCKET	G9 Base
SOURCE	G9 Line Voltage Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Compatible with Incandescent (TRIAC) dimmers
CERTIFICATION	cULus <b>E172892</b>

## GU24 SPECIFICATIONS

SOCKET	"Twist and lock" GU24 Base
SOURCE	GU24 Line Voltage Lamp (not included)
POWER SUPPLY	120V Line Voltage
DIMMING	Consult the lamp manufacturer for the compatible dimmer list.
CERTIFICATION	cULus <b>E303743</b>



**CONTRAST**  
LIGHTING

2015-07

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624 Fax: 1-877-839-7057  
info@contrastlighting.com  
www.contrastlighting.com

© 2015 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# Glass Shade

## 56

**Complete unit consists of:**  
**Canopy + Cable/Stem + Suspension System + Shade**

### FLUORESCENT SPECIFICATIONS

SOURCE	Compact Fluorescent Lamps 13W, 18W, 26W and 32W (not included)
POWER SUPPLY	120V/277V Universal Electronic Ballast
DIMMING	No dimming available
CERTIFICATION	cULus <b>E303743</b>


### LED SPECIFICATIONS

INSTALLATION	For PD1 and PDR1 canopies a junction box extension is provided.
CRI	90 +
COLOR TEMPERATURE	2,700K or 3,000K
POWER SUPPLY	Magtech Driver, constant current output.
SOURCE	Bridgelux LED arrays 6W. Delivers a lumen maintenance greater than 70% after 50,000 hours of operation (L70). Provide a clean white light without pixilation and produces high quality true color. Inside 3 steps MacAdam ellipse.
LUMENS OUTPUT	270 lumens, 45 lumens/watt
VOLTAGE	120V
WARRANTY	5 year warranty on the LED module and driver
DIMMING	Dimmable with leading edge/forward phase and trailing edge/reverse phase electronic low voltage dimmers, as well as Incandescent (TRIAC) dimmers. Please see Web site for complete compatibility chart.
CERTIFICATION	cULus <b>E357146</b>

### SUPPORT


GABY CENTER Gaby Center made of alloy steel.

**TC**




THREADED RING (only for LED) Threaded Ring made of high quality aluminum.

**RF**



### DIMENSIONS FOR 56

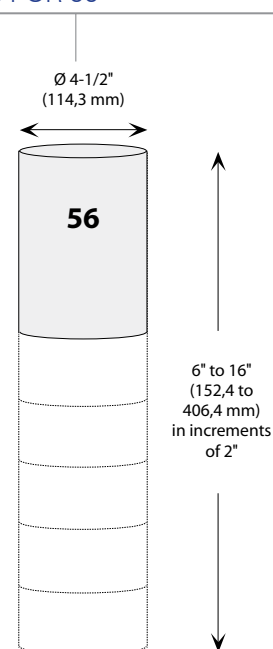

**CONTRAST**  
L I G H T I N G

2015-07

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624 Fax: 1-877-839-7057  
info@contrastlighting.com  
www.contrastlighting.com


© 2015 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# Glass Shade 56

**Complete unit consists of:  
Canopy + Cable/Stem + Suspension System + Shade**


### BI-PIN AND MR16 CANOPY CODIFICATION EXAMPLE

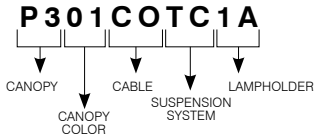

### BI-PIN and MR16 Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE OR STEM	SUSPENSION SYSTEM	LAMPHOLDER	VOLTAGE
<b>P1</b>	<b>PAINTED</b>	<b>12V COAXIAL CABLE</b>	<b>TC</b> Gaby Center	<b>1A</b> Bi-Pin and MR16	Standard: 120V/12V 277V/12V
<b>P2</b>	<b>01</b> White	<b>BK</b> Black			
<b>P3</b>	<b>02</b> Black	<b>CO</b> Metal			
<b>PD1</b>	<b>05</b> Architectural Bronze				
<b>PDR1</b>		<b>STEM</b>			
<b>PR1</b>	<b>PLATED</b>	<b>06</b> 06"			
<b>PR2</b>	<b>04</b> Chrome	<b>12</b> 12"			
	<b>04BR</b> Brushed Chrome	<b>18</b> 18"			
	<b>12BR</b> Brushed Nickel	<b>24</b> 24"			
	<b>13</b> Satin Nickel	<b>36</b> 36"			
		<b>48</b> 48"			
	(Available only with P1 and P2)	(Stem available only with P1, P2, P3 and PR1)			(Available only with Bi-Pin and stem)

### MED/E26 CANOPY CODIFICATION EXAMPLE



### MED/E26 Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE AND STEM	SUSPENSION SYSTEM	LAMPHOLDER
<b>P1</b>	<b>PAINTED</b>	<b>120V CABLE</b>	<b>TC</b> Gaby Center	<b>2A</b> MED/E26
<b>P2</b>	<b>01</b> White	<b>BK</b> Black		
<b>P3</b>	<b>02</b> Black	<b>WH</b> White		
<b>PD1</b>	<b>05</b> Architectural Bronze			
<b>PDR1</b>		<b>FABRIC</b>		
<b>PR1</b>	<b>PLATED</b>	<b>BKT</b> Black		
<b>PR2</b>	<b>04</b> Chrome	<b>ST</b> Silver		
	<b>04BR</b> Brushed Chrome	<b>OT</b> Orange		
	<b>12BR</b> Brushed Nickel	<b>RT</b> Red		
	<b>13</b> Satin Nickel	<b>BRT</b> Brown		
	(Available only with P1 and P2)	<b>BBT</b> Brown/Beige		
		(Stem available only with P1, P2, P3 and PR1)		

Available for Glass Shades of 10" (254 mm) and more.



**CONTRAST**  
LIGHTING

2015-07

1009, rue du Parc Industriel  
Lévis (Québec) G6Z 1C5 Canada  
Tel.: 1-888-839-4624 Fax: 1-877-839-7057  
info@contrastlighting.com  
www.contrastlighting.com


© 2015 Contrast Lighting M.L. Inc.  
All rights reserved

Contrast Lighting reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

# Glass Shade 56

Complete unit consists of:  
**Canopy + Cable/Stem + Suspension System + Shade**


## G9 CANOPY CODIFICATION EXAMPLE

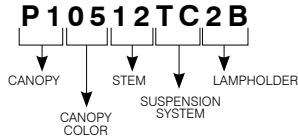

## G9 Canopy ORDERING CODE

CANOPY	CANOPY COLOR	STEM	SUSPENSION SYSTEM	LAMPHOLDER
<b>P1</b>	<b>PAINTED</b>	<b>STEM</b>	<b>TC</b>	<b>2B</b>
<b>P2</b>	<b>01</b> White	<b>06</b> 06"	<b>TC</b> Gaby Center	<b>2B</b> G9
<b>PR1</b>	<b>02</b> Black	<b>12</b> 12"		
	<b>05</b> Architectural Bronze	<b>18</b> 18"		
		<b>24</b> 24"		
		<b>36</b> 36"		
		<b>48</b> 48"		
	<b>PLATED</b>			
	<b>04</b> Chrome			
	<b>04BR</b> Brushed Chrome			
	<b>12BR</b> Brushed Nickel			
	<b>13</b> Satin Nickel			
	(Available only with P1 and P2)			

## GU24 CANOPY CODIFICATION EXAMPLE

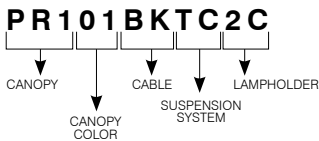

## GU24 Canopy ORDERING CODE


CANOPY	CANOPY COLOR	CABLE OR STEM	SUSPENSION SYSTEM	LAMPHOLDER
<b>P3</b>	<b>PAINT</b>	<b>120V CABLE</b>	<b>TC</b>	<b>2C</b>
<b>PD1</b>	<b>01</b> White	<b>BK</b> Black	<b>TC</b> Gaby Center	<b>2C</b> GU24
<b>PDR1</b>	<b>02</b> Black	<b>WH</b> White		
<b>PR1</b>	<b>05</b> Architectural Bronze			
		<b>STEM</b>		
		<b>06</b> 06"		
		<b>12</b> 12"		
		<b>18</b> 18"		
		<b>24</b> 24"		
		<b>36</b> 36"		
		<b>48</b> 48"		
	<b>PLATED</b>	<b>FABRIC</b>		
	<b>04BR</b> Brushed Chrome	<b>BK</b> Black		
	<b>12BR</b> Brushed Nickel	<b>ST</b> Silver		
	<b>13</b> Satin Nickel	<b>OT</b> Orange		
		<b>RT</b> Red		
		<b>BRT</b> Brown		
		<b>BBT</b> Brown/Beige		
		(Stem available only with P3 and PR1)		



# Glass Shade 56

**Complete unit consists of:  
Canopy + Cable/Stem + Suspension System + Shade**

### FLUORESCENT CANOPY CODIFICATION EXAMPLE

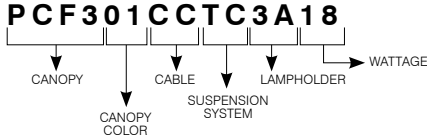


### Fluorescent Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE AND STEM	SUSPENSION SYSTEM	LAMPHOLDER	WATTAGE
<b>PCFR1</b> <b>PCF3</b>	<b>PAINT</b>	<b>CABLE</b>	<b>TC</b>	<b>3A</b>	
	<b>01</b> White	<b>BK</b> Black	<b>TC</b> Gaby Center	<b>3A</b> Compact Fluorescent	<b>13</b> 13W DTT G24q-1
	<b>02</b> Black	<b>CC</b> Clear			<b>18</b> 18W DTT G24q-2 18W TTT GX24q-2
	<b>05</b> Architectural Bronze				
	<b>PLATED</b>	<b>STEM</b>			<b>42</b> 26W DTT G24q-3 26W TTT GX24q-3 32W TTT GX24q-3 42W TTT GX24q-4
	<b>04BR</b> Brushed Chrome	<b>06</b> 06"			
	<b>12BR</b> Brushed Nickel	<b>12</b> 12"			
	<b>13</b> Satin Nickel	<b>18</b> 18"			
		<b>24</b> 24"			
		<b>36</b> 36"			
		<b>48</b> 48"			

Fluorescent available for Glass Shades of 12" (305 mm) and more.

### LED CANOPY CODIFICATION EXAMPLE



### LED Canopy ORDERING CODE

CANOPY	CANOPY COLOR	CABLE OR STEM	SUSPENSION SYSTEM	LAMPHOLDER	COLOR TEMPERATURE
<b>P3</b> <b>PD1</b> <b>PDR1</b> <b>PR1</b>	<b>PAINT</b>	<b>CABLE</b>	<b>RF</b>	<b>4A</b>	
	<b>01</b> White	<b>BK</b> Black	<b>RF</b> Threaded Ring	<b>4A</b> LED	<b>-2</b> 2,700K
	<b>02</b> Black	<b>CO</b> Metal			<b>-3</b> 3,000K
	<b>05</b> Architectural Bronze				
	<b>PLATED</b>	<b>STEM</b>			
	<b>04BR</b> Brushed Chrome	<b>06</b> 06"			
	<b>12BR</b> Brushed Nickel	<b>12</b> 12"			
	<b>13</b> Satin Nickel	<b>18</b> 18"			
		<b>24</b> 24"			
		<b>36</b> 36"			
		<b>48</b> 48"			


(Stem available only with P3 and PR1)



# Glass Shade 56

**Complete unit consists of:  
Canopy + Cable/Stem + Suspension System + Shade**

GLASS SHADE CODIFICATION EXAMPLE

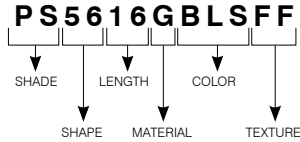

Glass Shade ORDERING CODE

SHAPE	SHADE	LENGTH*	MATERIAL	COLOR	TEXTURE	ASPECT (Available only with clear texture)	STEM
<b>PS</b>	<b>56</b>	<b>06</b> 6 inches <b>08</b> 8 inches <b>10</b> 10 inches <b>12</b> 12 inches <b>14</b> 14 inches <b>16</b> 16 inches	<b>G</b> Glass	<b>BLS</b> Smoked Blue <b>GRS</b> Smoked Grey <b>M</b> Smoked Amber	<b>C</b> Clear <b>FF</b> Frosted interior/exterior <b>ICE</b> Ice <b>LK</b> Lake <b>LT1</b> Lotus frosted flower <b>LT2</b> Lotus glossy flower <b>STR</b> Striped <b>SW</b> Snow	<b>A4</b> Bubbly <b>A6</b> Granite	<b>...</b> Standard <b>-TM</b> Steel pins  (Only with LED)
				<b>R</b> Red	<b>C</b> Clear <b>FF</b> Frosted interior/exterior <b>ICE</b> Ice <b>LK</b> Lake <b>SW</b> Snow	<b>A4</b> Bubbly <b>A6</b> Granite	
				<b>N</b> Natural	<b>C</b> Clear <b>FF</b> Frosted interior/exterior <b>ICE</b> Ice <b>LK</b> Lake <b>LT1</b> Lotus frosted flower <b>LT2</b> Lotus glossy flower <b>STR</b> Striped <b>SW</b> Snow	<b>A4</b> Bubbly <b>A6</b> Granite	(Textures available only with lengths of glass 8" and 12")
				<b>BK</b> Black <b>CAP</b> Cappuccino <b>CHO</b> Chocolate <b>FUR</b> Furia <b>NEP</b> Neptune <b>W</b> White	<b>...</b> Standard : White interior/ Glossy exterior <b>FF</b> Frosted interior/exterior		
				<b>EVA</b> Eva <b>VAN</b> Vanilla	<b>C</b> Clear <b>FF</b> Frosted interior/exterior		

\* MED/E26 available for Glass Shades of 10" (254 mm) and more.  
Fluorescent available for Glass Shades of 12" (305 mm) and more.

