








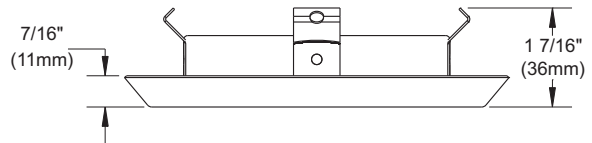
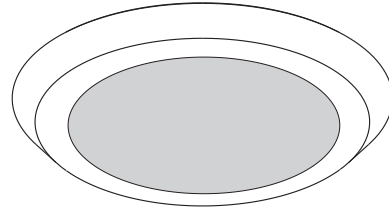
SPECIFICATION SHEET

4" 2000 SERIES

A2400S


BEVELED SHOWER TRIM WITH FROSTED LENS

	Wet Location YES
	Compact Fluorescent 13W, 18W or 26W
	PAR PAR20 35-50W
	Insulated ceiling housing ISCA2000, ISF2000L
	New construction housing NW2000LF, NW2000CAS, NWF2000LU18,26
	Remodel housing CA2000S, F2000L, F2000LU18,26
	Standard : Frosted lens Available : Clear convex lens (« 1 »), Frosted convex lens (« 2 »), Clear lens (« 3 »), Frosted with clear center lens (« 4 »). To order, place the lens code after the trim code, before the « S ». . Ex. : A2403S-01
LENSES	



COMPATIBLE HOUSINGS

35W PAR20 ISCA2000	50W PAR20 CA2000S NW2000CAS	13W CF F2000L ISF2000L NW2000LF
18W CF F2000LU18 NWF2000LU18	26W CF F2000LU26 NWF2000LU26	

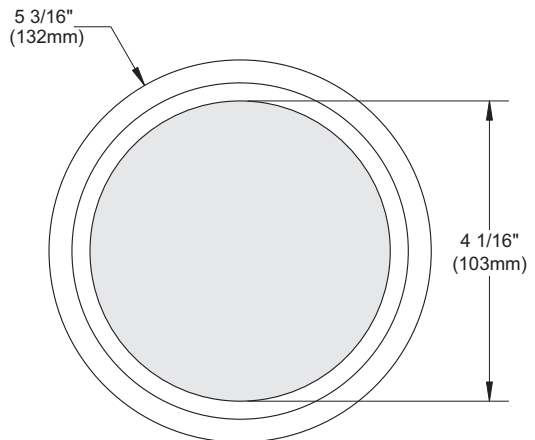

ENERGY STAR® Requirements

120 Volt ONLY

This trim meets every ENERGY STAR requirements when combined with the following housings :

F2000LU18	F2000LU26	NWF2000LD26
NWF2000LU18	NWF2000LU26	

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.



Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

FEBRUARY 2011