








SPECIFICATION SHEET


4" 2000 SERIES

A2401S

BEVELED SHOWER TRIM WITH CONVEX FROSTED LENS




| | |
|---|--|
|  | Wet Location YES |
|  | Compact Fluorescent 13W, 18W or 26W |
|  | PAR PAR20 35-50W |
|  | Insulated ceiling housing ISCA2000, ISF2000L |
|  | New construction housing NW2000LF, NW2000CAS, NWF2000LU18,26 |
|  | Remodel housing CA2000S, F2000L, F2000LU18,26 |
|  | Standard : Frosted lens Available : Clear lens (3), Frosted with clear center lens (4). To order, place the lens code after the trim code, before the « S ». . Ex. : A2403S-01 |

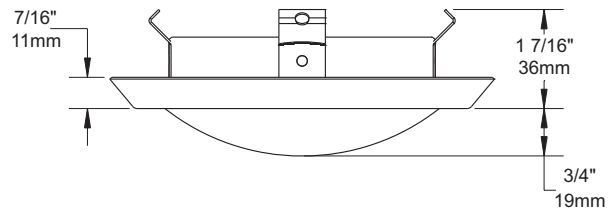

COMPATIBLE HOUSINGS


| 35W PAR20 | 50W PAR20 | 13W CF |
|---|--------------------------|--------------------------------|
| ISCA2000 | CA2000S NW2000CAS | F2000L ISF2000L NW2000LF |
| 18W CF | 26W CF | |
| F2000LU18 ISF2000LU18 NWF2000LU18 | F2000LU26 NWF2000LU26 | |



ENERGY STAR Requirements
120 Volt ONLY

This trim meets every ENERGY STAR requirements when combined with the following housings :

| | | |
|-------------|-------------|-------------|
| F2000LU18 | F2000LU26 | NWF2000LD26 |
| NWF2000LU18 | NWF2000LU26 | |

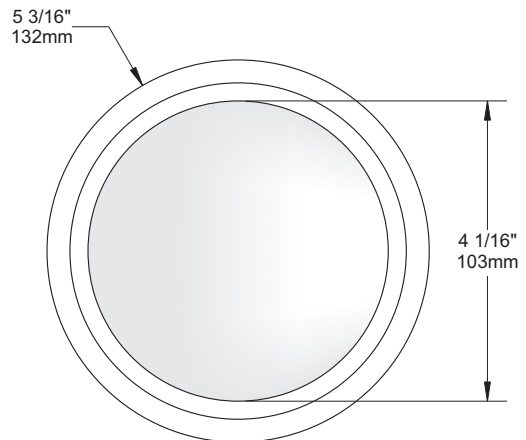

TRIM FINISHES

- | | | |
|--------------|--------------------------|----------------------|
| -01 WHITE | -04BR BRUSHED CHROME | -08 ANTIQUE SILVER |
| -02 BLACK | -05 ARCHITECTURAL BRONZE | -11 MATTE WHITE |
| -03 24K GOLD | -06 ANTIQUE COPPER | -12BR BRUSHED NICKEL |
| -04 CHROME | -07 ANTIQUE BRASS | -13 SATIN NICKEL |
| | | -14 ALMOND |

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

Project _____

Representative _____



CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JUNE 2010