

SPECIFICATION SHEET

4" 2000 SERIES

A2450VT

LOW PROFILE TRIM WITH FROSTED GLASS TUBE



YES

Damp Location



PAR20 50W

PAR



Glass

Available lengths : 3,4,5,6 and 7" (76,102,122,152 and 178mm).
Add tube length at the end of the code.

Examples : A2450VT-01-NFF03
A2450VT-01-NFF04
A2450VT-01-NFF05
A2450VT-01-NFF06
A2450VT-01-NFF07

Standard glass color : Natural Frosted interior / exterior
For other glass colors, contact Customer Service.



Insulated ceiling housing
ISCA2000



New construction housing
NW2000CA



Remodel housing
CA2000

COMPATIBLE HOUSINGS



50W PAR20

CA2000
NW2000CA
ISCA2000

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for interior use only. For exterior use and up to wet conditions, **MARINE GRADE** treatment is recommended. Available for finishes -01, -02, -05, -06, -11 and -14 only.

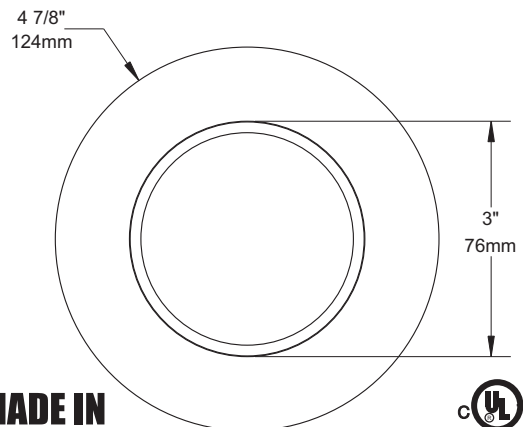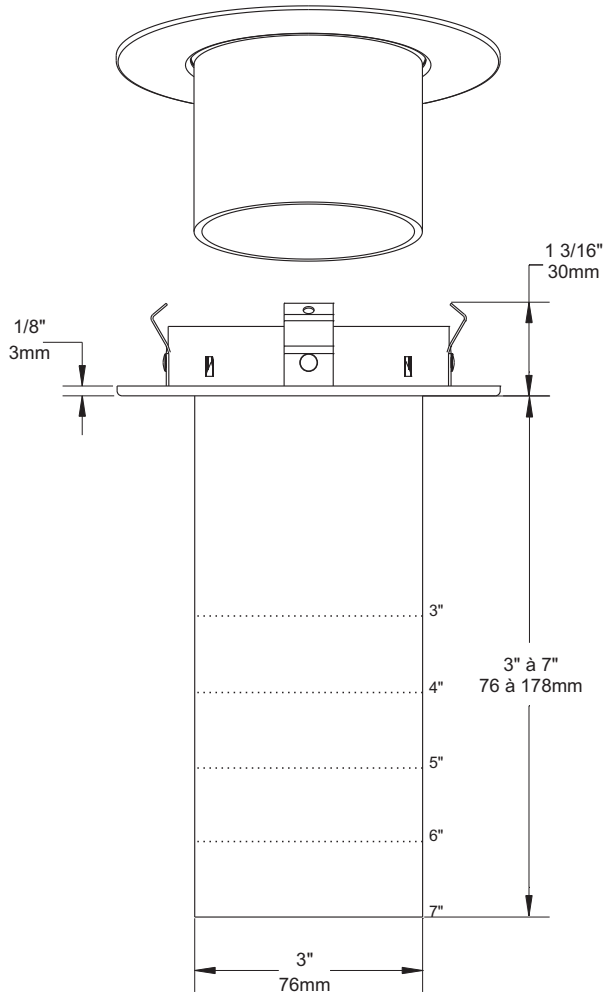

Certified UL Standards

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

APRIL 2010