

SPECIFICATION SHEET

4" 2000 SERIES

F2450VT

LOW PROFILE TRIM WITH FROSTED GLASS TUBE



Damp Location YES



Compact Fluorescent 18W, 26W or 32W




Glass

Available lengths : 3,4,5,6 and 7" (76,102,122,152 and 178mm).
Add tube length at the end of the code.

Examples : F2450VT-01-NFF03
F2450VT-01-NFF04
F2450VT-01-NFF05
F2450VT-01-NFF06
F2450VT-01-NFF07

Standard glass color : Natural Frosted interior / exterior
For other glass colors, contact Customer Service.



ISF2000LU18



NWF2000LU18,26,32



F2000LU18,26,32

COMPATIBLE HOUSINGS

18W CF

F2000LU18
ISF2000LU18
NWF2000LU18

26W CF

F2000LU26
NWF2000LU26

32W CF

F2000LU32
NWF2000LU32



ENERGY STAR Requirements

120 Volt ONLY




This trim meets every ENERGY STAR requirements when combined with the following housings :

F2000LU18 F2000LU26 NWF2000LD26
NWF2000LU18 NWF2000LU26

TRIM FINISHES

| | | |
|--------------|--------------------------|----------------------|
| -01 WHITE | -04BR BRUSHED CHROME | -08 ANTIQUE SILVER |
| -02 BLACK | -05 ARCHITECTURAL BRONZE | -11 MATTE WHITE |
| -03 24K GOLD | -06 ANTIQUE COPPER | -12BR BRUSHED NICKEL |
| -04 CHROME | -07 ANTIQUE BRASS | -13 SATIN NICKEL |
| | | -14 ALMOND |

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

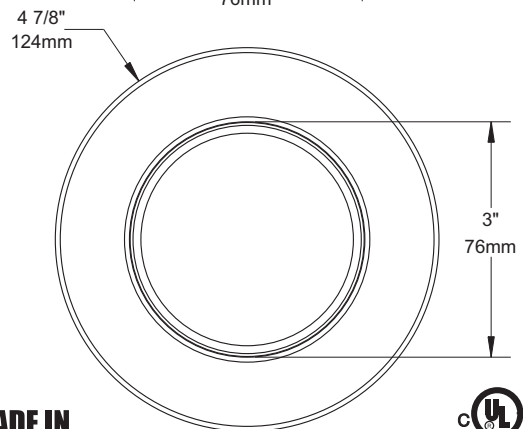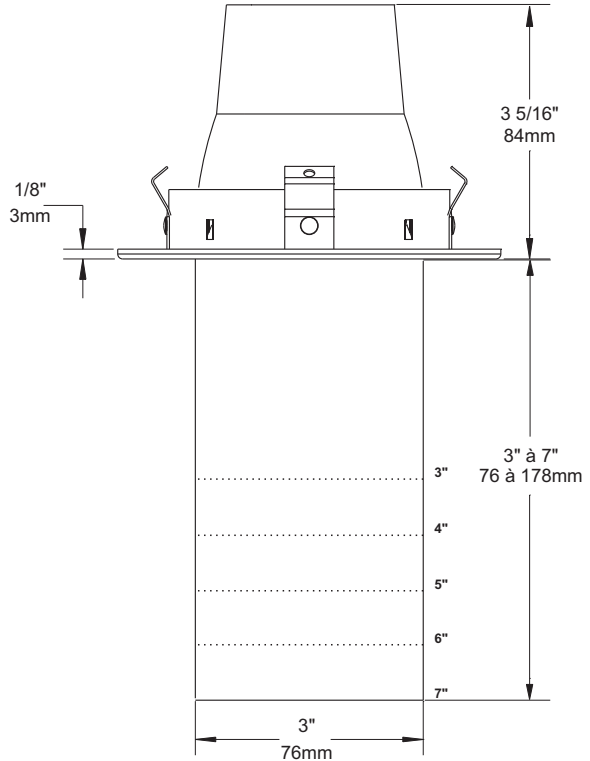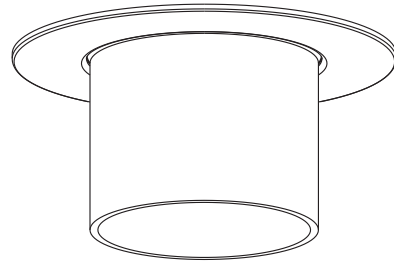

Certified UL Standards

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JUNE 2010