









SPECIFICATION SHEET

7" COMPACT FLUORESCENT SERIES

F7


REMODEL HOUSING FOR HORIZONTAL LAMP

 Damp Location	YES  E175084									
 ELECTRONIC BALLAST										
 OD Cut	8" (203mm)									
 Voltage	120-277 VOLTS (CAN & USA.) 347 VOLTS (CAN)									
 Compact Fluorescent	13W, 18W, or 26W <table border="1" style="display: inline-table; vertical-align: middle;"> <tr> <td>13W : G24q-1</td> <td>4 PIN</td> <td>DTT</td> </tr> <tr> <td>18W : G24q-2</td> <td>4 PIN</td> <td>DTT</td> </tr> <tr> <td>26W : G24q-3</td> <td>4 PIN</td> <td>DTT</td> </tr> </table> 	13W : G24q-1	4 PIN	DTT	18W : G24q-2	4 PIN	DTT	26W : G24q-3	4 PIN	DTT
13W : G24q-1	4 PIN	DTT								
18W : G24q-2	4 PIN	DTT								
26W : G24q-3	4 PIN	DTT								

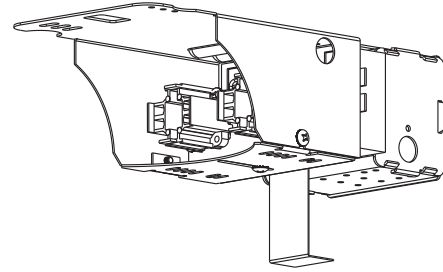


CODES :

F7U13	2 X 13W G24q-1	DTT	120 to 277 VOLT <u>U</u> NIVERSAL BALLAST
F7U18	2 X 18W G24q-2	DTT	
F7U26	2 X 26W G24q-3	DTT	
F7313	2 X 13W G24q-1	DTT	347 VOLT BALLAST (FOR CANADA ONLY)
F7318	2 X 18W G24q-2	DTT	
F7326	2 X 26W G24q-3	DTT	
F7D18	2 X 18W G24q-2	DTT	120 VOLT <u>D</u> IMMABLE BALLAST
F7D26	2 X 26W G24q-3	DTT	
F7D182	2 X 18W G24q-2	DTT	277 VOLT DIMMABLE BALLAST (FOR U.S.A. ONLY)
F7D262	2 X 26W G24q-3	DTT	

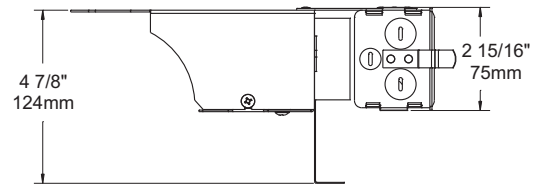

COMPATIBLE TRIMS

FR7C	FR7OLA
FR7O	FR7OLB
FR7OM	FR7T

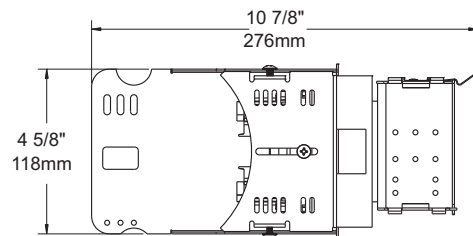

ENERGY STAR Requirements

120 Volt ONLY

- Lamp with a rated life of 10 000 hours or more, in these colors : 2700K, 3000K, 3500K or 4100K.

Generic lamp designation :

CFQ13W/G24q	CFQ26W/G24q	FR7C
CFQ18W/G24q	CFTR26W/GX24q	FR7O
CFTR18W/GX24q	CFTR32W/GX24q	FR7OM
		FR7OLA
		FR7OLB
		FR7T

Combine housing with one of the following trims :

FR7C
FR7O
FR7OM
FR7OLA
FR7OLB
FR7T



TECHNICAL SPECIFICATIONS

HOUSING FEATURES

Galvanized steel.
Preset socket assembly and keyhole on socket assembly for easier installation.
Below-ceiling accessible.

LISTINGS

UL-cUL listed for through branch wiring and damp location.

LOCKING SYSTEM

Perfect fit into ceiling.
No light leak.
Hooks PAT#CAN.2.088.648 and #USA.5.377.088
Takes up to 7/8" thick ceiling.

SOCKET

High temperature-rated.
130°C instead of 90°C.
Stainless steel contacts.

BALLAST

120V/277V Class P
HPF Electronic ballast.
Program start without flickering 10% THD and end of life lamp protection.
5 year warranty.

CONTRAST

L I G H T I N G

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 TEL.:1-888-839-4624 Fax : 1-877-839-7057

info@contrastlighting.com
www.contrastlighting.com

JUNE 2010