








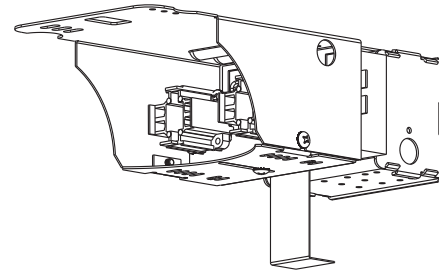
SPECIFICATION SHEET

8" COMPACT FLUORESCENT SERIES

F8


REMODEL HOUSING FOR HORIZONTAL LAMP

 Damp Location	YES  E175084									
 ELECTRONIC BALLAST										
 OD Cut	9 1/4" (235mm)									
 Voltage	120-277 VOLTS (CAN & USA.) 347 VOLTS (CAN)									
 Compact Fluorescent	26W, 32W or 42W <table border="1" style="display: inline-table; vertical-align: middle;"> <tr><td>26W : G24q-3</td><td>4 PIN</td><td>DTT</td></tr> <tr><td>32W : GX24q-3</td><td>4 PIN</td><td>TTT</td></tr> <tr><td>42W : GX24q-4</td><td>4 PIN</td><td>TTT</td></tr> </table> 	26W : G24q-3	4 PIN	DTT	32W : GX24q-3	4 PIN	TTT	42W : GX24q-4	4 PIN	TTT
26W : G24q-3	4 PIN	DTT								
32W : GX24q-3	4 PIN	TTT								
42W : GX24q-4	4 PIN	TTT								




CODES :

F8U26	2 X 26W	G24q-3	DTT	120 to 277 VOLT <u>U</u> NIVERSAL BALLAST
F8U32	2 X 32W	GX24q-3	TTT	
F8U42	2 X 42W	GX24q-4	TTT	
F8326	2 X 26W	G24q-3	DTT	347 VOLT BALLAST (FOR CANADA ONLY)
F8332	2 X 32W	GX24q-3	TTT	
F8342	2 X 42W	GX24q-4	TTT	
F8D26	2 X 26W	G24q-3	DTT	120 VOLT <u>D</u> IMMABLE BALLAST
F8D32	2 X 32W	GX24q-3	TTT	
F8D42	2 X 42W	GX24q-4	TTT	
F8D262	2 X 26W	G24q-3	DTT	277 VOLT DIMMABLE BALLAST (FOR U.S.A. ONLY)
F8D322	2 X 32W	GX24q-3	TTT	
F8D422	2 X 42W	GX24q-4	TTT	

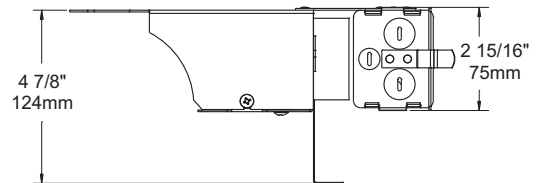

COMPATIBLE TRIMS

FR8C	FR8OLA
FR8O	FR8OLB
FR8OM	FR8T

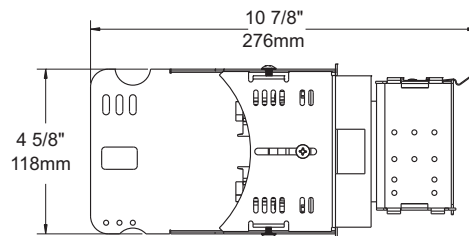

ENERGY STAR Requirements

120 Volt ONLY

- Lamp with a rated life of 10 000 hours or more, in these colors : 2700K, 3000K, 3500K or 4100K.
- Combine housing with one of the following trims :

Generic lamp designation :

CFQ13W/G24q	CFQ26W/G24q	FR8C
CFQ18W/G24q	CFTR26W/GX24q	FR8O
CFTR18W/GX24q	CFTR32W/GX24q	FR8OM
		FR8OLA
		FR8OLB
		FR8T

MADE IN CANADA



Certified UL Standards

TECHNICAL SPECIFICATIONS

HOUSING FEATURES

Galvanized steel.
Preset socket assembly and keyhole on socket assembly for easier installation.
Below-ceiling accessible.

LISTINGS

UL-cUL listed for through branch wiring and damp location.

LOCKING SYSTEM

Perfect fit into ceiling.
No light leak.
Hooks PAT#CAN.2.088.648 and #USA.5.377.088
Takes up to 7/8" thick ceiling.

SOCKET

High temperature-rated.
130°C instead of 90°C.
Stainless steel contacts.

BALLAST

120V/277V Class P
HPF Electronic ballast.
Program start without flickering 10% THD and end of life lamp protection.
5 year warranty.

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Christophe, Qc, CAN G6Z 1C5 TEL.:1-888-839-4624 Fax : 1-877-839-7057

info@contrastlighting.com
www.contrastlighting.com

JUNE 2010