






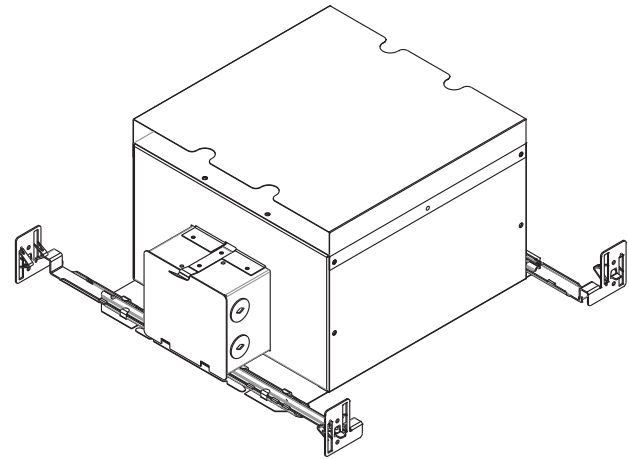


SPECIFICATION SHEET



4 3/8" PAR30 SERIES

ISCA2575

INSULATED HOUSING FOR PAR30 BULB



	YES
Damp Location	
	PAR30 75W MAX
PAR	
	120 VOLTS (CAN & USA)
Voltage	
	T°C 120°C No 031
Thermal Protector	
	4 5/8" (117mm)
OD Cut	
	E174023
UL LISTED	
	Overall Dimensions : Length : 13 3/4" (350mm) with bars :15 3/8" (391mm) Width : 10" (254mm) with bars :10" to 24 1/2" (622mm) Height : 6 1/8" (156mm)
Dimensions	

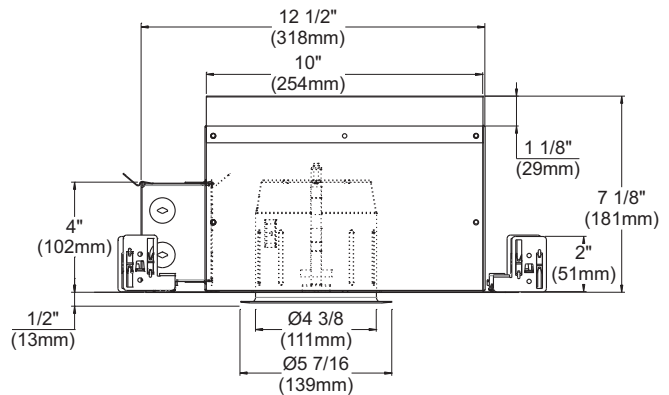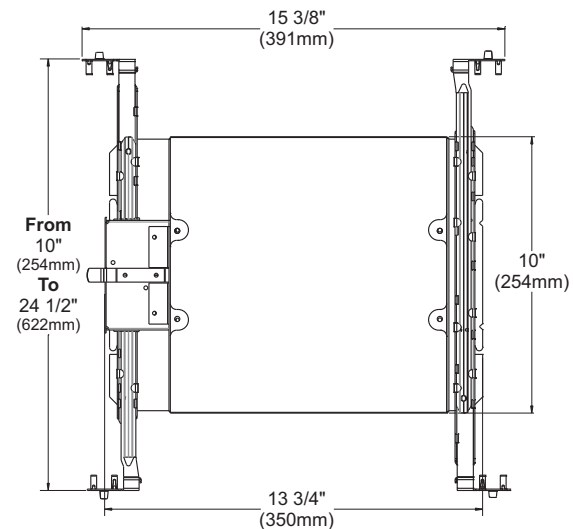

COMPATIBLE TRIMS

75W PAR30

BAFRE2575-01 REFRE2575-BK
 BAFRE2575-02 REFRE2575-CH
 *C2575 (optional) REFRE2575-CL

*BAFRE2575 is needed to fix the C2575 optional collar.

N.B.: Pots are painted white. Trims are optional.

OPTIONS

CHICAGO PLENUM

Requirement for all lighting fixtures installed in the city of Chicago. Complies for ceiling air Plenum.
 Code : ISCA2575P

TITLE 24

Complies with California State Title 24 Energy Code.
 Code : ISCA2575W

TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.
 Below-ceiling accessible.
 Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
 Takes up to 7/8" thick ceiling.
 Perfect fit into ceiling.
 No light leak.



Your representative : _____

Your project : _____