


# SPECIFICATION SHEET

3 1/2" 3000 SERIES

# ISMR3000M ISMR3000M2 ISMR3000M3

PROJECT:

## INSULATED CEILING HOUSING WITH MAGNETIC TRANSFORMER

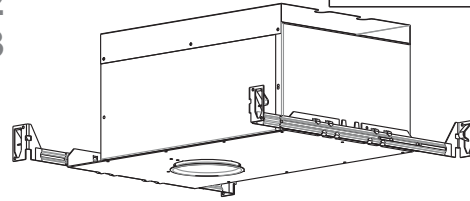

YES

Damp Location



MR16

MR16 20 À 50W, MR16 IR 37-50W



Magnetic transformer  
EC50M 50 VA 120V / 12V  
EC50M2 50 VA 277V / 12V  
EC50M3 50 VA 347V / 12V



Voltage

ISMR3000M : 120 VOLTS (CAN & USA)  
ISMR3000M2 : 277 VOLTS (USA ONLY)  
ISMR3000M3 : 347 VOLTS (CAN ONLY)



Thermal Protector

T°C 120°C No 031



OD Cut

3 3/4" (95mm)





LISTED

E174023



Dimensions

Overall Dimensions :  
Length : 19 1/2" (495mm)  
Width : 10" (254mm)  
Height : 7 1/8" (181mm)

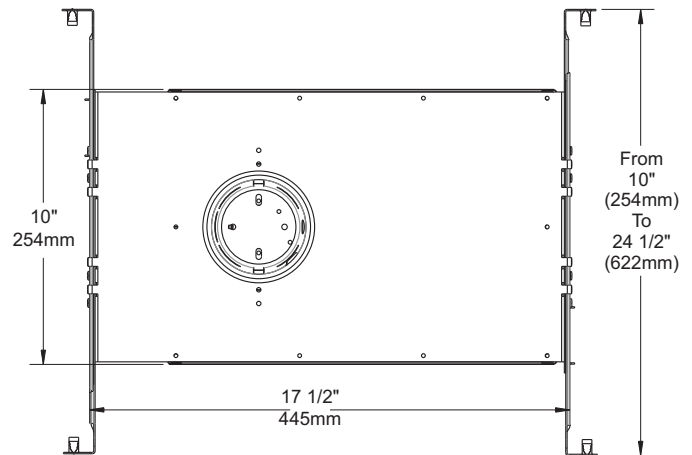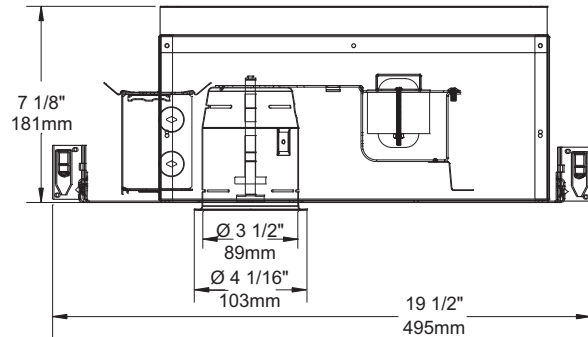

### COMPATIBLE TRIMS

MR16 20W	MR16 35W	MR16 37W	MR16 50W
R3151W	R3151 S3450	R3171	R3450D T3260
R3651W	R3152 S3500	T3671	R3470 T3300
S3450D	R3601 S3500D		T3000 T3400
T3185	R3601W S3601		T3100 T3400D
T3850	R3602 S3651		T3125 T3400W
	R3651 T3152		T3145 T3450
	R3652 T3165		T3145D T3450D
	S3145 T3600		T3145DG T3450W
	S3145D T3650		T3145W T3500
	S3151 T3652		T3200 T3500D
	S3400 T3800		T3250 T3500W
	S3400D T3900		T3250DG T3700

### OPTIONS

#### CHICAGO PLENUM

Requirement for all lighting fixtures installed in the city of Chicago. Complies for ceiling air Plenum.  
Code : ISMR3000MP

#### TITLE 24

Complies with California State Title 24 Energy Code.  
Code : ISMR3000MW

### TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.  
Below-ceiling accessible.  
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.  
Takes up to 7/8" thick ceiling.  
Perfect fit into ceiling.  
No light leak.



Your representative : \_\_\_\_\_

Your project : \_\_\_\_\_

**CONTRAST**  
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN, G6Z1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057  
info@contrastlighting.com  
www.contrastlighting.com

MARCH 2011