






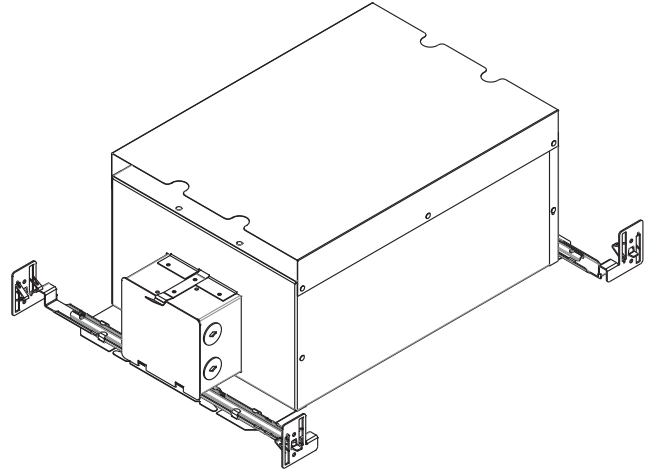


# SPECIFICATION SHEET



3 1/2" 3000 SERIES

# ISMR3000T

## INSULATED CEILING HOUSING WITHOUT CONVERTER



	<b>YES</b>
<b>Damp Location</b>	
	<b>50W MAX</b>
<b>GU/GZ-10</b>	
	<b>ISMR3000T : 120 VOLTS (CAN &amp; USA)</b>
<b>Voltage</b>	
	<b>T°C 120°C No 031</b>
<b>Thermal Protector</b>	
	<b>3 3/4" (96mm)</b>
<b>OD Cut</b>	
	<b>E174023</b>
<b>CULUS LISTED</b>	
	<b>Overall Dimensions :</b> Length : 19 3/8" (492mm) Width : 10" (254mm) Height : 7 1/8" (181mm)
<b>Dimensions</b>	

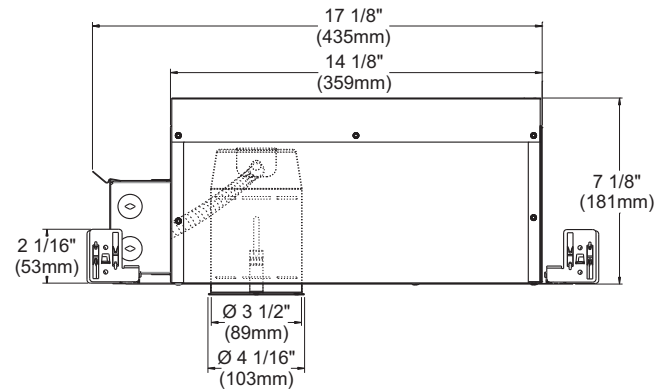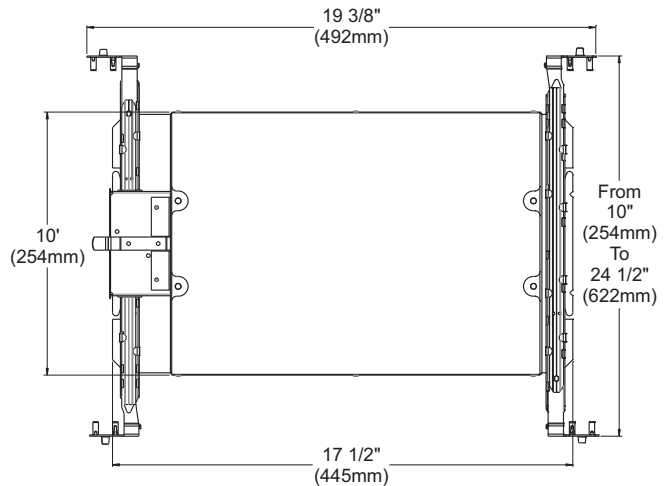

### COMPATIBLE TRIMS

#### GU/GZ-10 50W

T3000	T3145D SM	T3260	T3400D ST	T3500
T3100	T3145D ST	T3300	T3450	T3500D SM
T3125	T3200	T3400	T3450D SM	T3500D ST
T3145	T3250	T3400D SM	T3450D ST	

### OPTIONS

#### CHICAGO PLENUM

Requirement for all lighting fixtures installed in the city of Chicago. Complies for ceiling air Plenum.  
Code : ISMR3000TP

#### TITLE 24

Complies with California State Title 24 Energy Code.  
Code : ISMR3000TW

### TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.  
Below-ceiling accessible.  
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.  
Takes up to 7/8" thick ceiling.  
Perfect fit into ceiling.  
No light leak.



Your representative : \_\_\_\_\_

Your project : \_\_\_\_\_