








SPECIFICATION SHEET

6" COMPACT FLUORESCENT SERIES



NWF6V


NEW CONSTRUCTION HOUSING FOR VERTICAL LAMP

	YES		E175084												
	ÉLECTRONIC BALLAST														
	120/277 VOLTS (CAN & USA) 347 VOLTS (CANADA)														
	13W to 42W <table border="0" style="display: inline-table; vertical-align: middle;"> <tr> <td>13W : G24q-1</td> <td>4 PIN DTT</td> <td>26W : GX24q-3</td> <td>4 PIN TTT</td> </tr> <tr> <td>18W : G24q-2</td> <td>4 PIN DTT</td> <td>32W : GX24q-3</td> <td>4 PIN TTT</td> </tr> <tr> <td>26W : G24q-3</td> <td>4 PIN DTT</td> <td>42W : GX24q-4</td> <td>4 PIN TTT</td> </tr> </table>			13W : G24q-1	4 PIN DTT	26W : GX24q-3	4 PIN TTT	18W : G24q-2	4 PIN DTT	32W : GX24q-3	4 PIN TTT	26W : G24q-3	4 PIN DTT	42W : GX24q-4	4 PIN TTT
13W : G24q-1	4 PIN DTT	26W : GX24q-3	4 PIN TTT												
18W : G24q-2	4 PIN DTT	32W : GX24q-3	4 PIN TTT												
26W : G24q-3	4 PIN DTT	42W : GX24q-4	4 PIN TTT												
	6 3/4" (171mm)														
	Housing and trim assembly overall dimensions: Height : 9 3/16" (233mm) Length : 17 3/16" (437mm) Width : 8 1/2" (216mm) with bars : 10" (254mm)														

CODES :

NWF6V <u>U</u> 13	1 X	13W	120 to 277 VOLT <u>UNIVERSAL</u> BALLAST
NWF6V <u>U</u> 18	1 X	18W	
NWF6V <u>U</u> 42	1 X	26-32-42W	
NWF6V <u>3</u> 13	1 X	13W	347 VOLT BALLAST (FOR CANADA ONLY)
NWF6V <u>3</u> 18	1 X	18W	
NWF6V <u>3</u> 42	1 X	26-32-42W	
NWF6V <u>D</u> 18	1 X	18W	120 VOLT <u>DIMMABLE</u> BALLAST
NWF6V <u>D</u> 42	1 X	26-32-42W	
NWF6V <u>D</u> 18 <u>2</u>	1 X	18W	277 VOLT <u>DIMMABLE</u> BALLAST (FOR U.S.A. ONLY)
NWF6V <u>D</u> 42 <u>2</u>	1 X	26-32-42W	

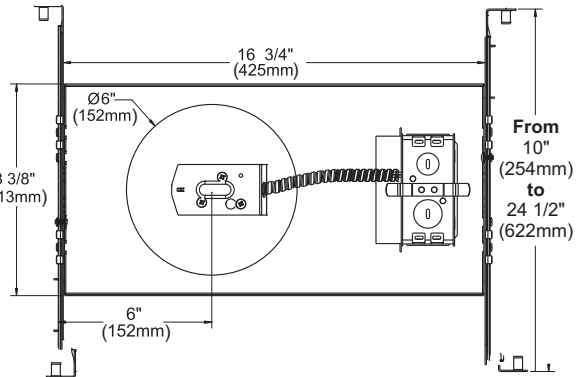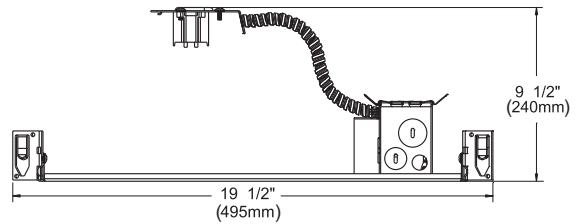



ENERGY STAR Requirements®
120 Volt ONLY

- Lamp with a rated life of 10 000 hours or more, in these colors : 2700K, 3000K, 3500K or 4100K.

Combine housing with one of the following trims :

FR6VO	FR6VOW120
FR6VOLA	FR6VOMW90
FR6VOLB	FR6VOMW90D
FR6VOM	FR6VOMW120
FR6VOW90	
FR6VOW90D	

Generic lamp designation :

CFQ13W/G24q	CFTR26W/GX24q
CFQ18W/G24q	CFTR32W/GX24q
CFTR18W/GX24q	CFTR42W/GX24q
CFQ26W/G24q	

COMPATIBLE TRIMS

FR6VO	FR6VOM	FR6VOW120	FR6VOMW120
FR6VOLA	FR6VOW90	FR6VOMW90	FR6VOG
FR6VOLB	FR6VOW90D	FR6VOMW90D	



TECHNICAL SPECIFICATIONS

<p>HOUSING FEATURES Galvanized steel. Preset socket assembly and keyhole on socket assembly for easier installation. Below-ceiling accessible.</p> <p>LISTINGS UL-cUL listed for through branch wiring and damp location.</p>	<p>LOCKING SYSTEM Perfect fit into ceiling. No light leak. Hooks PAT#CAN.2.088.648 and #USA.5.377.088 Takes up to 7/8" thick ceiling.</p> <p>SOCKET High temperature-rated. 130°C instead of 90°C. Stainless steel contacts.</p>	<p>MOUNTING BARS Locked into place and adjustable from 10" to 24 1/2" using the integral T-Bars tabs. May be installed in trusses or suspended ceilings.</p>	<p>BALLAST 120V/277V Class P HPF Electronic ballast. (347V HPF Electronic ballast, available in Canada. For ordering change U to 3.) Program start without flickering 10% THD and end of life lamp protection, 5 years warranty.</p>	<p>DIMMING CAPABILITY 18W + When ordering a dedicated dimmable ballast, in product codes change «U» to «D» on 120V. For 277V dimmable, change «U» to «D» and add suffix «2». Ballast type : Advance Mark X. N.B. Dimmable ballast are dedicated to either 120 or 277V.</p>
---	--	---	--	--