

SPECIFICATION SHEET

4" 2000 SERIES

R2100

REGRESSED ADJUSTABLE SQUARE TRIM



YES

Damp Location



MR16

37-50W MAX



Insulated ceiling housing

ISMR2000E37, ISMR2000M37, ISMR2000M



New construction housing

NW2000E, NW2000CE, NW2000CM, NW2000LM



Remodel housing

IT2000M, IT2000CM, IT2000E, IT2000CE



Reflector




Standard reflector : painted black.

Also available : painted white and clear specular anodized. To order a white trim with a white reflector, add a «W» after the trim color. Ex. : R2100-01W, R2100-11W.

Available only with -01 and -11 finishes.

To order a white trim with a clear specular reflector, add an «S» after the trim color. Ex.: R2100-08S.

Available with all finishes.

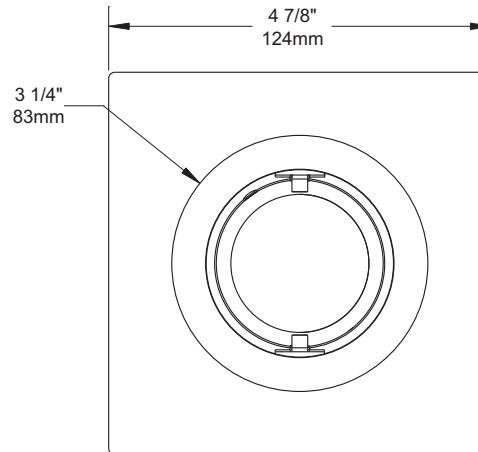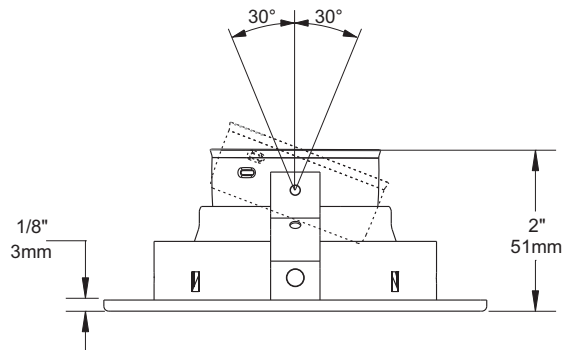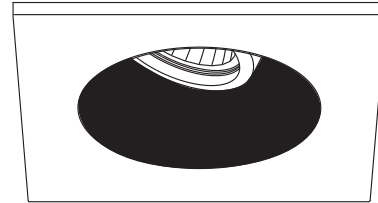

COMPATIBLE HOUSINGS

37W MAX	42W MAX	50W MAX
ISMR2000E37 ISMR2000M37	IT2000CE IT2000CM NW2000CE NW2000CM	ISMR2000M IT2000E IT2000M NW2000E NW2000LM

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for interior use only. For exterior use and up to wet conditions, MARINE GRADE treatment is recommended. Available for finishes -01, -02, -05, -06, -11 and -14 only.



Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Christophe, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

MARCH 2010