

SPECIFICATION SHEET


4" 2000 SERIES


R2450VT

LOW PROFILE TRIM WITH GLASS TUBE

 **YES**
Damp Location

 **35-75W**
MR16

 **Glass**
Available lengths : 3,4,5,6 and 7" (76,102,122,152 and 178mm).
Add tube length at the end of the code.
Examples : R2450VT-01-NFF03
R2450VT-01-NFF04
R2450VT-01-NFF05
R2450VT-01-NFF06
R2450VT-01-NFF07
Standard glass color : Natural Frosted interior / exterior
For other glass colors, contact Customer Service.

 **Insulated ceiling housing**
ISMR2000E35, ISMR2000M35, ISMR2000M
ISMR2000E37, ISMR2000M37

 **New construction housing**
NW2000CE, NW2000CM,
NW2000E, NW2000LM

 **Remodel housing**
IT2000CE, IT2000CM
IT2000E, IT2000M

COMPATIBLE HOUSINGS

75W MR16	50W MR16	42W MR16	37W MR16	35W MR16
NW2000LM	ISMR2000M IT2000E IT2000M NW2000CM NW2000E	NW2000CE IT2000CE IT2000CM	ISMR2000E37 ISMR2000M37	ISMR2000E35 ISMR2000M35




TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.

MADE IN CANADA

 **LISTED**
Certified UL Standards

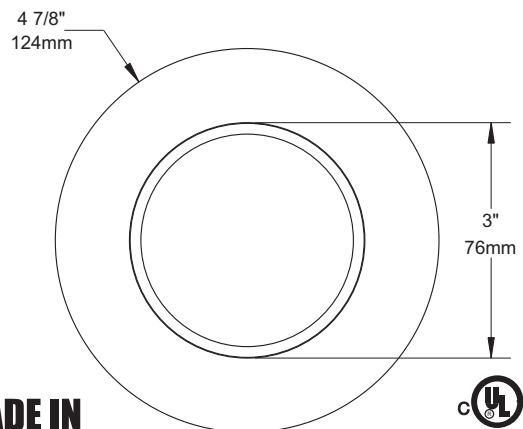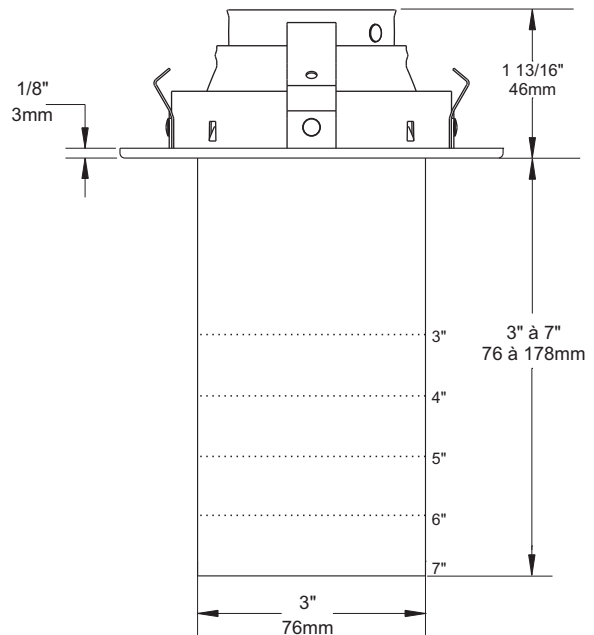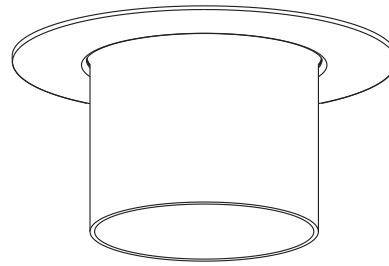

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JULY 2010