








SPECIFICATION SHEET



3 1/2" 3000 SERIES

T3185

SQUARE ADJUSTABLE REGRESSED TRIM WITH SLOT APERTURE


| | |
|-------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|
|  | YES |
| Damp Location | |
|  | 20-50W |
| MR16 | |
|  | 50W* |
| GU/GZ-10 | |
|  | DOES NOT APPLY |
| Reflector | |
|  | Insulated ceiling housing ISMR3000E20, ISMR3000M, ISMR3000M20 |
|  | New construction housing NW3000CE, NW3000CM, NW3000LE, NW3000LM, NW3000LT* |
|  | Remodel housing IT3000LE, IT3000LM, IT3000LT* |

To reduce glare, it is recommended to use the housings bearing black pots. (NW3000LM, IT3000LM).

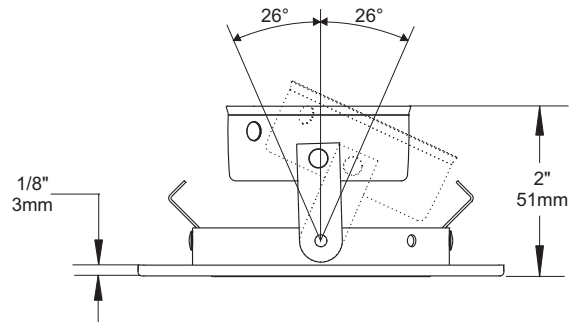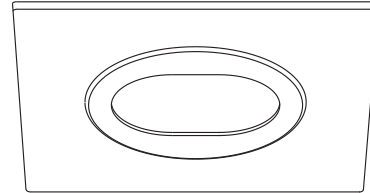

COMPATIBLE HOUSINGS

| 50W GU-GZ/10 | 50W MR16 | 20W MR16 |
|--------------|----------|-------------|
| IT3000LT* | IT3000LE | ISMR3000E20 |
| NW3000LT* | IT3000LM | ISMR3000M |
| | NW3000CE | ISMR3000M20 |
| | NW3000CM | |
| | NW3000LE | |
| | NW3000LM | |

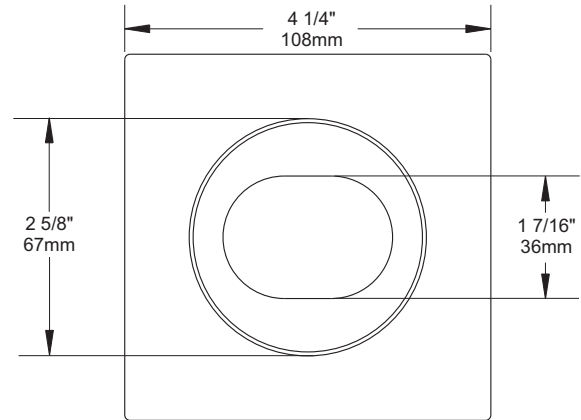

TRIM FINISHES

| | | |
|--------------|--------------------------|----------------------|
| -01 WHITE | -04BR BRUSHED CHROME | -08 ANTIQUE SILVER |
| -02 BLACK | -05 ARCHITECTURAL BRONZE | -11 MATTE WHITE |
| -03 24K GOLD | -06 ANTIQUE COPPER | -12BR BRUSHED NICKEL |
| -04 CHROME | -07 ANTIQUE BRASS | -13 SATIN NICKEL |
| | | -14 ALMOND |

Unless otherwise indicated, trims are for **interior use only**. For exterior use and up to wet conditions, **MARINE GRADE** treatment is **recommended**. Available for finishes -01, -02, -05, -06, -11 and -14 only.



Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Chrysostome, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

JUNE 2010