


SPECIFICATION SHEET

3 1/2" 3000 SERIES

T3650

LOW PROFILE REGRESSED TRIM WITH PINHOLE OPENING

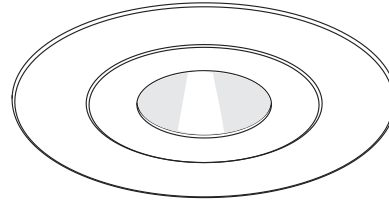

YES

Damp Location



MR16

20-50W



GU/GZ-10

50W*



Reflector

Standard : Anodized aluminum

Available :

Anodized	Specular	Painted
Azur (AZ)	Black (BK)	White (-01)
Burnt orange (BO)	Champagne (CH)	Black (-02)
Cobalt blue (CB)	Clear (CL)	Matte White (-11)
Inca Gold (IG)		
Ruby (RU)		

To order a white trim with the standard reflector :

T3650-01

To order a white trim with an Azur smooth reflector :

T3650-01AZ



Insulated ceiling housing

ISMR3000E20, ISMR3000E35, ISMR3000M, ISMR3000M20, ISMR3000M35




New construction housing

NW3000CE, NW3000CM, NW3000LE, NW3000LM, NW3000LT*




Remodel housing

IT3000LE, IT3000LM

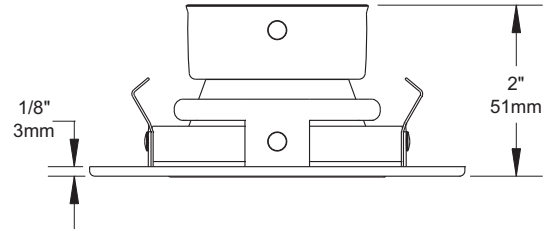

4 7/16"
113mm

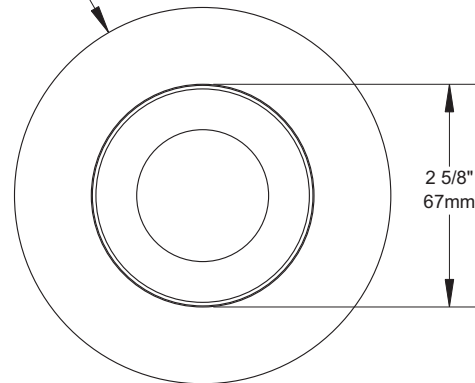

COMPATIBLE HOUSINGS

50W GU-GZ/10	50W MR16	35W MR16	20W MR16
NW3000LT	IT3000LE IT3000LM NW3000CE NW3000CM NW3000LE NW3000LM	ISMR3000M ISMR3000E35 ISMR3000M35	ISMR3000E20 ISMR3000M20

TRIM FINISHES

-01 WHITE	-04BR BRUSHED CHROME	-08 ANTIQUE SILVER
-02 BLACK	-05 ARCHITECTURAL BRONZE	-11 MATTE WHITE
-03 24K GOLD	-06 ANTIQUE COPPER	-12BR BRUSHED NICKEL
-04 CHROME	-07 ANTIQUE BRASS	-13 SATIN NICKEL
		-14 ALMOND

Unless otherwise indicated, trims are for interior use only. For exterior use and up to wet conditions, **MARINE GRADE** treatment is recommended. Available for finishes -01, -02, -05, -06, -11 and -14 only.



Certified UL Standards

Project _____

Representative _____

CONTRAST
LIGHTING

1009, rue du Parc Industriel, Saint-Jean-Christophe, Qc, CAN G6Z 1C5 Tel.: 1-888-839-4624 Fax : 1-877-839-7057
info@contrastlighting.com
www.contrastlighting.com

APRIL 2010