

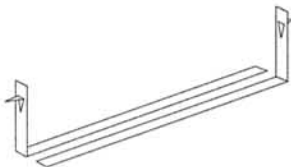
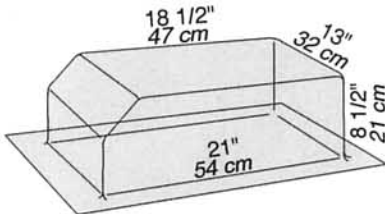
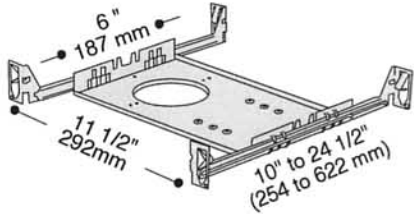
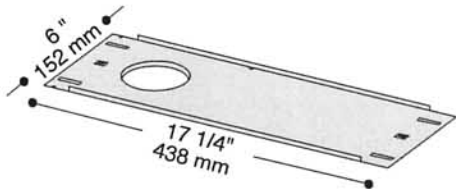




ADJUSTABLE MOUNTING PLATE

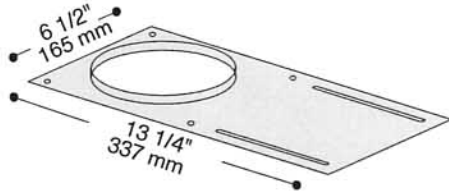

BARS
Short Bars adjustable (2)
from 13 1/2" to 21 3/4"
343 mm to 553 mm

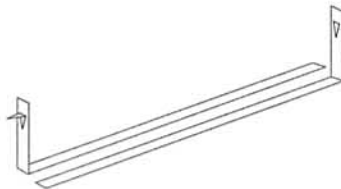

BARL
Long Bars adjustable (2)
from 19 1/2" to 34"
495 mm to 863 mm
(Also used with "IC" housings)

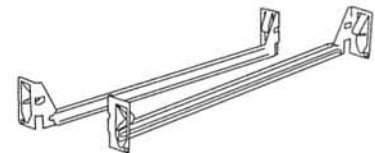

BARK
Interlocking Bars adjustable (2)
from 10" to 24 1/2"
254 mm à 662 mm
(Also used with "NW" housings)

MODEL	OD CUT	DESCRIPTION
P2575N / 2675N P2000N / P7000N P2550N / 3000N P4000N P5000N	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	ADJUSTABLE MOUNTING PLATE FOR "NON-IC" TYPE HOUSING FOR NEW CONSTRUCTION, WOOD JOIST (mounting bars not required)
P2575 / 2675 P2000 / P7000 P2550 / 3000 P4000 P5000	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	MOUNTING PLATE FOR "NON-IC" TYPE HOUSING FOR NEW CONSTRUCTION (mounting bars required)
P2575L P2000L P2550L P4000L P5000L	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	LONG MOUNTING PLATE FOR "NON-IC" TYPE HOUSING FOR NEW CONSTRUCTION
P2575NW P2000NW / P7000NW P2550NW / P3000NW P4000NW	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm)	LONG MOUNTING PLATE FOR "NON-IC" TYPE HOUSING FOR NEW CONSTRUCTION (mounting bars required)
VAPBAR	Wide 13" (32 mm) Long 18 1/2" (47 mm) Height 8 1/2" (21 mm)	VAPOUR BARRIER FOR "IC" TYPE HOUSING

Representative: