

MULTI-AIM™ SPECIFICATION SHEET

**MULTI-AIM DECO SERIES 50W 4 LIGHT MR16
RECESSED REMODEL / REMOTE**
LAMPING: 3 x 50 watt max.

- Cat. No.: L-IT-316C-3E-HB-** _____ - _____
 Cat. No.: L-RM-316C-3R-HB- _____ - _____

Type: _____
 Project: _____

Fixture Description:

Recessed 3-light MR16 fixture for use with Multi-Aim Deco series plate housing trim and various combinations of Contrast Lighting 2, 3 and 4 downlight fixture trims. For remodel applications. Interior housing available in matte black finish. Deco plate and fixture trims available in 14 standard plated and painted finishes, consult Multi-Aim catalog for colors. Includes mounting clips

Features:

1. **Adjustable flex.**
2. **Integral dimmable transformer for each lamp.** Primary lead is 120V. Secondary lead is 11.5V. 277V also available. Features 'hands free' maintenance (access above ceiling not required). 3 year mfg. warranty on electronic and magnetic transformers
3. **Socket:** Steatite MR16 bi-pin double contact pure nickel 250C 18awg Teflon leads. Limited 3 year warranty.
4. **Downlight Fixture trims.** Available in 4" dia. 7000 series and 3-1/2" dia. 3000 series spots. Consult Multi-Aim catalog for styles and finish colors.
5. **Multi-Aim Deco Plate:** Available in oval (DPO) and rectangular (DPR) in finish colors to match downlight fixture trims. Consult Multi-Aim catalog for style and color codes.
6. **Junction box** is 16 gauge, 4-in, 4-out branch circuit wiring. UL listed for through branch wiring. Accessible below ceiling.
7. **Thermal protector** meets NEC and UL/cUL requirements.
8. **Slot adjustable spring clips** provides for easy installation and accomodates ceilings up to 2" thick.
9. **Die formed fixture frame in body and fixture body** constructed of 18 gauge CRS, powder-coated baked enamel finish. Frame-in housing complete with 16 gauge j-box for 4-in, 4-out branch circuit wiring. Fully enclosed wiring compartment.

Notes


All galvanized steel construction available. Consult factory.

Labels


UL / cUL
 Suitable for damp location




Bottom View

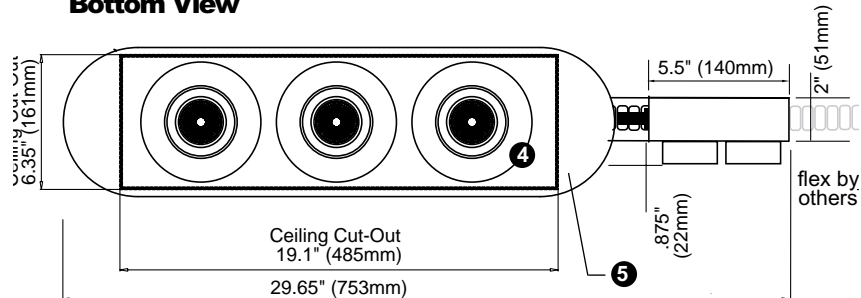

Side View

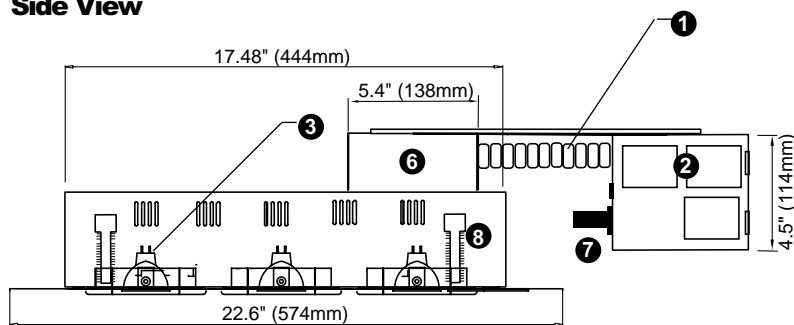

End View



Ordering Information - check appropriate boxes.

Catalog No.	Transformer	Voltage	Deco Plate Trim and Finish (see catalog)	Fixture Trim and Finish (see catalog)	Options
<input checked="" type="checkbox"/> L-IT-316C-3	<input type="checkbox"/> E (Electronic) <input type="checkbox"/> M (Magnetic)	<input type="checkbox"/> 120 (120V) <input type="checkbox"/> 277 (277V)	<input type="checkbox"/> DPO _____ <input type="checkbox"/> DPR _____ Example: DPO-7000-2	<input checked="" type="checkbox"/> _____ Example: T7024-2	<input type="checkbox"/> GS (Galvanized Steel) <input type="checkbox"/> _____ <input type="checkbox"/> _____

Example: L-IT-316C-3-E-120+DPO7024-4 Order fixture trim(s) separately. Example: T7024-4

We reserve the right to change specifications without notice.

©2004 Light in Design / Contrast Lighting.



1009 du Parc Industriel • Saint-Jean-Chrysostome
 Quebec, Canada G6Z1C5
 Tel.: 418.839.4624 • Fax: 418.839.7057
 Toll-free tel.: 1.888.839.4624
 www.contrastlighting.com
 LIT316C3.3.042304