

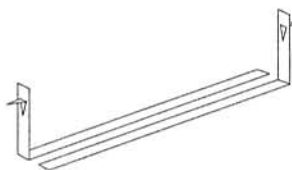
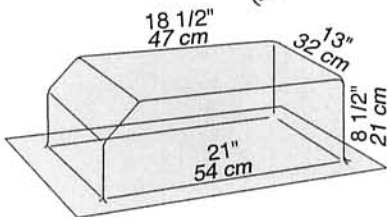
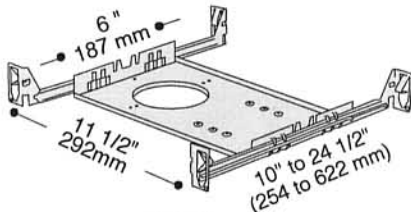
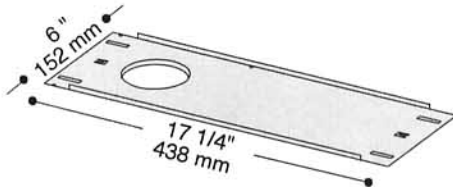




**PLAQUE DE MONTAGE AJUSTABLE**

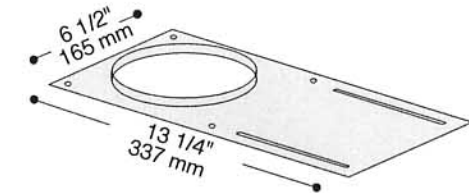

**BARS**  
Barres courtes ajustables (2)  
de 13 1/2" à 21 3/4"  
343 mm à 553 mm

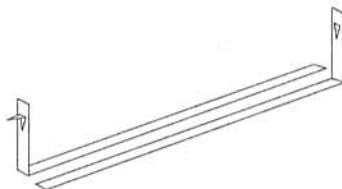

**BARL**  
Barres longues ajustables (2)  
de 19 1/2" à 34"  
495 mm à 863 mm  
(Utilisées dans les boîtiers "IC")

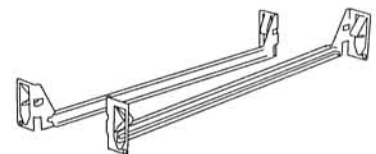

**BARK**  
Barres emboîtables ajustables (2)  
de 10" à 24 1/2"  
254 mm à 662 mm  
(Utilisées dans les boîtiers "NW")

MODÈLE	PERÇAGE	DESCRIPTION
P2575N / 2675N P2000N / P7000N P2550N / 3000N P4000N P5000N	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	PLAQUE DE MONTAGE AJUSTABLE POUR TYPE "NON-IC" (barres non requises) pour nouvelle construction.
P2575 / 2675 P2000 / P7000 P2550 / 3000 P4000 P5000	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	PLAQUE DE MONTAGE POUR TYPE "NON-IC" (barres requises) pour nouvelle construction.
P2575L P2000L P2550L P4000L P5000L	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm) Ø 2 3/4" (70 mm)	LONGUE PLAQUE DE MONTAGE POUR TYPE "NON-IC" pour nouvelle construction.
P2575NW P2000NW / P7000NW P2550NW / P3000NW P4000NW	Ø 4 5/8" (118 mm) Ø 4 5/16" (109 mm) Ø 3 3/4" (95 mm) Ø 3 5/16" (84 mm)	PLAQUE DE MONTAGE POUR TYPE "NON-IC" (avec barres) pour nouvelle construction.
<b>VAPBAR</b>	Largeur 13" (32 mm) Longueur 18 1/2" (47 mm) Hauteur 8 1/2" (21 mm)	COUPE VAPEUR POUR TYPE "IC"

Représentant: \_\_\_\_\_