

ALUXF60

6" A-lux Series

Complete Unit: LED Round Downlight Trim including the Junction Box and Driver

Project _____

Notes _____

Fixture Type _____



Date _____



Recessed ultra-thin Air Tight LED trim for insulated ceiling and suitable for damp locations. The thin profile with spring clips allows for quick and easy installation. Ideal for confined spaces.

SPECIFICATIONS

LED	<p>LED Module Epistar 2835 L70 @ 50,000 hours</p> <p>Color Temperature and lumens:</p> <p>2700K: 1,050 lm 3000K: 1,100 lm 4000K: 1,150 lm</p> <p>CRI: 80+ Power Factor: >85% Voltage: 120 VAC Power: 15 Watts</p>
CEILING CUTOUT	<p>ø 6-1/4" (160 mm) MIN ø 6-1/8" (156 mm) / MAX ø 6-1/2" (165 mm)</p>
BEAM	<p>Very Wide Flood → 110°</p>
OPERATING TEMPERATURE	<p>-20°C to 40°C</p>
CERTIFICATION	<ul style="list-style-type: none"> • Certified ETL for damp locations and insulated ceilings (type IC) • Certified ASTM E283 Air Tight • Certified Energy Star®
WARRANTY	<p>5-year warranty</p>

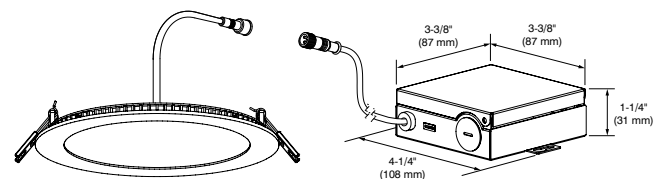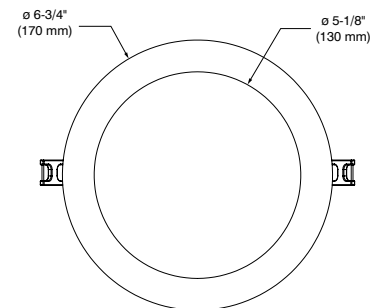

JUNCTION BOX

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2019 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

SPECIFICATION SHEET

ALUXF60


6" A-lux Series

**Complete Unit: LED Round Downlight Trim
including the Junction Box and Driver**

SPECIFICATIONS (CON'T)

TRIM	Thin profile 1" (25 mm) White (-01) finish available
MOUNTING	The space required beyond ceiling material is 1-1/4" (32 mm). The maximal thickness of the ceiling is 1" (25 mm). Beyond this thickness, springs will apply less pressure between the trim and the ceiling. The base of the trim will thus have some difficulty to sit flush with the ceiling.
JUNCTION BOX	Junction box with independent auxiliary connection and keyholes for fixing to the structure. Includes driver with factory assembled triple push-in connectors.
DIMMING	Compatible with Electronic Low Voltage (ELV) and Incandescent (TRIAC) dimmers. We invite you to consult frequently our Web site to find our suggested compatible dimmers list: www.contrastlighting.com

CODIFICATION EXAMPLE

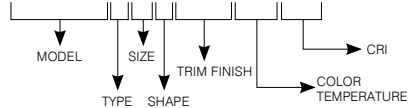ALUXF60-013080

ORDERING CODES

MODEL	TYPE	SIZE	SHAPE	TRIM FINISH	COLOR TEMPERATURES
ALUX	F	6	0	-01	
ALUX A-lux	F Fixed	6 6 inches	0 Round	-01 White	2780 2,700K (80+ CRI) — 1,050 lm 3080 3,000K (80+ CRI) — 1,100 lm 4080 4,000K (80+ CRI) — 1,150 lm

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2019 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

ALUXF60

6" A-lux Series

**Complete Unit: LED Round Downlight Trim
including the Junction Box and Driver**

COMPATIBLE DIMMERS

Brand	Series	Model
Lutron	Ariadni	AYCL-153P
	Diva	DVCL-153P
	Diva	DVELV-300P
	Maestro	MACL-153MH
	Maestro Wireless	MRF2-6CL
	Nova T	NTELV-300P
	Skylark	SELV-300P
	Skylark Contour	CTCL-153P
Leviton	Toggler	TGCL-153P
	Sureslide Decora	6674
LeGrand	ILLUMATECH	IPL06
	Adorne	ADTP703TU
Cooper	Harmony	H703PTW
	Aspire	9540
	Devine	DAL06P

CONTRASTE

1009, rue du Parc Industriel
Lévis (Québec) G6Z 1C5 Canada
Tel.: 1-888-839-4624
Fax.: 1-877-839-7057
contrastlighting.com
info@contrastlighting.com

© 2019 Contrast Lighting M.L. Inc.
All rights reserved

Contrast Lighting M.L. Inc. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.