

ISGU2575



4 3/8" GU24 SERIES

Project	
Notes	
Fixture Type	
Date	

White painted Insulated Housing

SPECIFICATIONS


HOUSING DETAILS	Galvanized steel of 0,051" (1,3 mm) thickness. Below-ceiling accessible.
MOUNTING	Perfect fit into ceiling. No light leak. Hooks PAT#CAN.2.088.648 and #USA. 5.377.088 Fit into up to 7/8" (22 mm) ceiling thickness. Ceiling cutout: 4 5/8" (117 mm)
TRIMS AND ACCESSORIES COMPATIBLES	BAFRE2575 (baffle) (-01 White/ -02 Black) C2575 (collar) (All standard finishes are available) REFRE2575 (reflector) (-BK Black / -CH Champagne / -CL Clear) *The C2575 collar requires BAFRE2575 deflector or reflector REFRE2575 to be fixed.
COMPATIBLE LAMP	Fluorescent compact 23W GU24
OPTIONS	California Title 24 For product that meets California Title 24 energy code requirements, add " W " to code: ISCA2575 W Chicago Plenum For product that meets Chicago Plenum requirements, add " P " to code: ISCA2575 P
VOLTAGE	120-277 Volts (CAN & É.-U.)
CERTIFICATION	cULus Listed for damp location. E175084

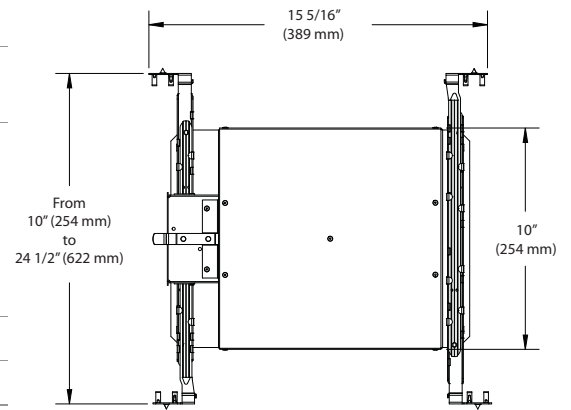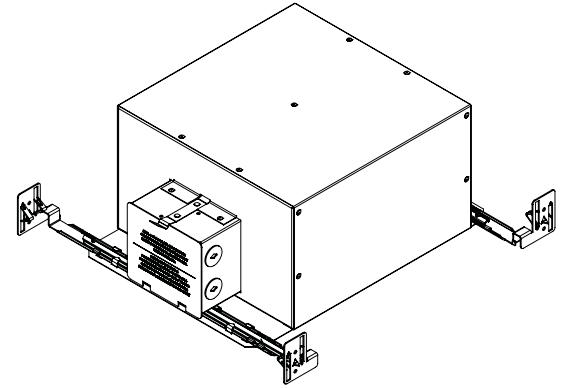

ORDERING CODE for Housing

Example: **ISGU2575-BK**

MODEL	REFLECTOR/BAFFLE	
ISGU2575		
ISGU2575	Specular Reflector	Phenolic Baffle
	BK Black	-01 White
	CH Champagne	-02 Black
	CL Clear	

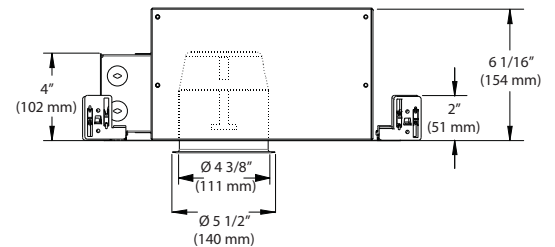

ORDERING CODE for Trim Collar

Example: **C2575-04**

MODEL	FINISH			
C2575				
C2575	-01 White	-05 Architectural Bronze	-13 Satin Nickel	
	-02 Black	-06 Antique Copper	-14 Almond	
	-03 Gold Plated 24K	-08 Antique Silver	-15 Metallic Grey	
	-04 Chrome	-11 Matte White	-16 Satin Chrome	
	-04BR Brushed Chrome	-12BR Brushed Nickel		

