






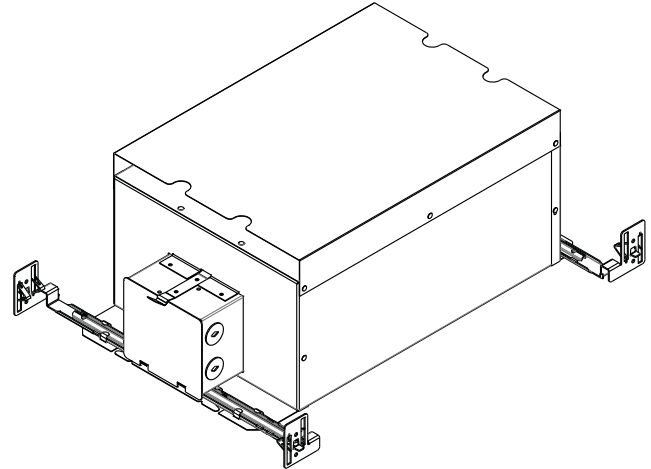


# SPECIFICATION SHEET



3 1/2" 3000 SERIES

# ISMR3000T

## INSULATED CEILING HOUSING WITHOUT CONVERTER



	YES
	50W MAX
	ISMR3000T : 120 VOLTS (CAN & USA)
	T°C 120°C No 031
	3 3/4" (96mm)
	E174023
	<b>Overall Dimensions :</b> Length : 19 3/8" (492mm) Width : 10" (254mm) Height : 7 1/8" (181mm)

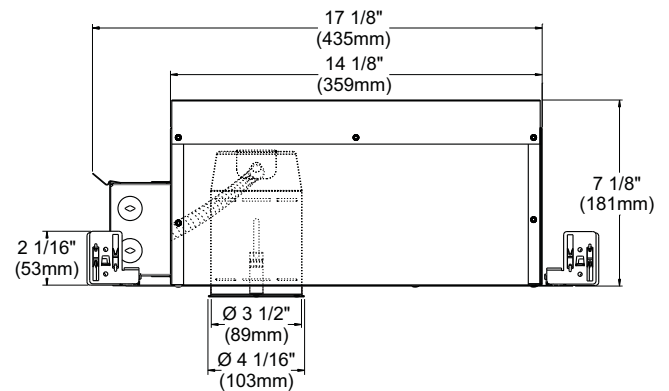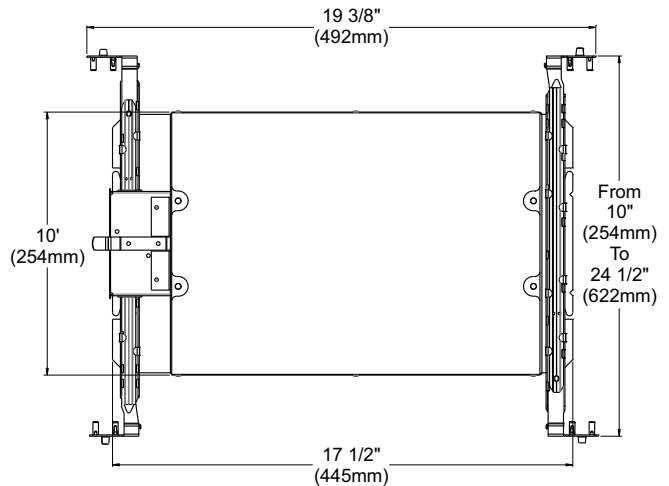

### COMPATIBLE TRIMS

**GU/GZ-10 50W**

T3000	T3145D ST	T3400	T3450D ST	T3500D SM
T3100	T3200	T3400D SM	T3450K	T3500D ST
T3125	T3250	T3400D ST	T3450W	
T3145	T3260	T3450	T3450WK	
T3145D SM	T3300	T3450D SM	T3500	

### OPTIONS

#### CHICAGO PLENUM

Requirement for all lighting fixtures installed in the city of Chicago. Complies for ceiling air Plenum.  
Code : ISMR3000TP

#### TITLE 24

Complies with California State Title 24 Energy Code.  
Code : ISMR3000TW

### TECHNICAL SPECIFICATIONS

0,021" (0,53mm) thickness Galvanized Steel.  
Below-ceiling accessible.  
Hooks PAT#CAN 2,088,648 and #USA 5,377,088.  
Takes up to 1 1/2" thick ceiling.  
Perfect fit into ceiling.  
No light leak.



Your representative : \_\_\_\_\_

Your project : \_\_\_\_\_