









SPECIFICATION SHEET

3 1/2" 3000 SERIES

MH3000GX

REMODEL HOUSING FOR METAL HALIDE LAMP

	YES
Damp Location	
	20W MAX MR16 HID GX10 Twist & Lock (M156)
MR16 HID	
	120 VOLTS (CAN & USA)
Voltage	
	Electronic Ballast
	Induction thermal protector
Thermal Protector	
	Ø 3 3/4" (95mm)
Ceiling cutout	
	E331150
UL LISTED	
	Overall Dimensions : Length : 14 7/8" (378mm) Width : 4 1/16" (103mm) Height : 7" (178mm)
Dimensions	

Codification

HOUSING TYPE	SERIE	LAMP	VOLTAGE	WATTAGE
MH	3000	GX	1	20




Metal Halide High Intensity Discharge

COMPATIBLE TRIMS

R3151	T3125	T3145DG	T3250DG
R3470	T3145	T3165	T3450
R3470D	T3145D	T3250	T3650

TECHNICAL SPECIFICATIONS

0,051" (1,3mm) thickness Galvanized Steel.
 Below-ceiling accessible.
 Hooks PAT#CAN 2,088,648 and #USA 5,377,088.
 Takes up to 7/8" thick ceiling.
 Perfect fit onto ceiling. No light leak.
 Each part of the housing could be at 3" (76 mm) MINIMUM from insulation (if applicable).
 5 KV. 2A / 500V Pulse Rated.
 120V Converter. HPF, THD. Outdoor Type 1.
 Before lamp replacement, shut off the 120V supply at source. Turn on only when the lamp is replaced.
 If the lamp or the 120V supply wires should be defective, the ballast will not be working for 1.5 to 30 minutes, according to the problem.
 3 year Warranty (operating temperature below 80°C, less than 4000 hours of use per year.)

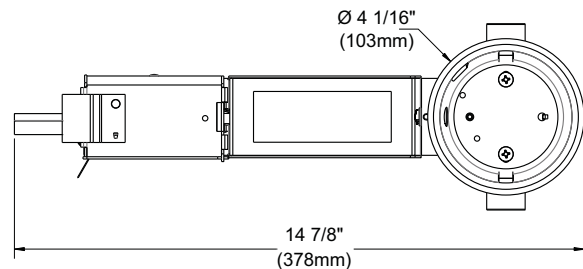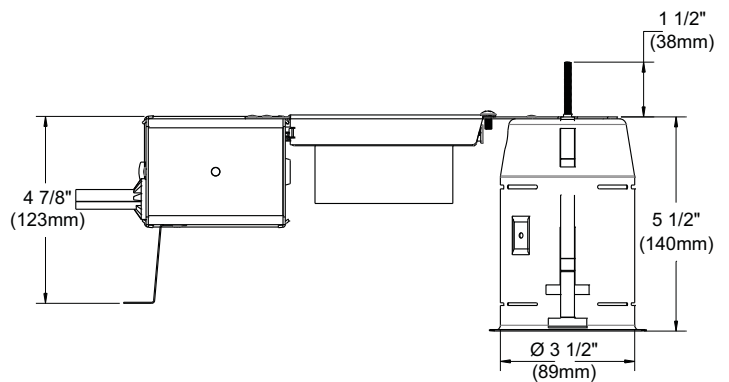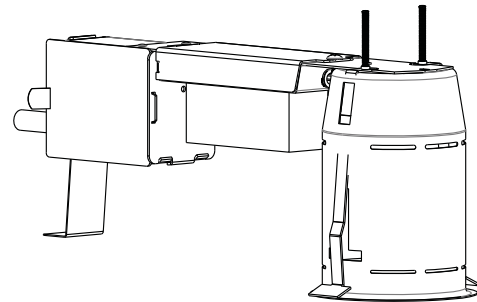

Your representative : _____

Your project : _____