

# XIC40PAR-L

# P R I O R I

4" Series - PRIORI


Project \_\_\_\_\_

Notes \_\_\_\_\_

Fixture type \_\_\_\_\_

Date \_\_\_\_\_

## Insulated Box IC Air Tight PAR20 Housing

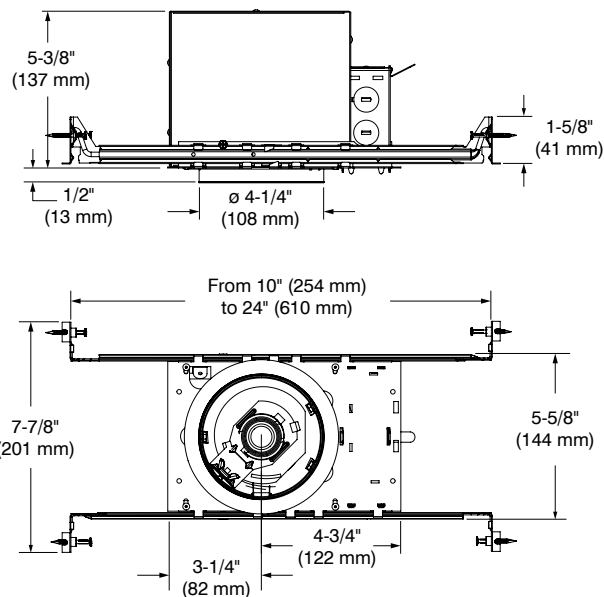

### SPECIFICATIONS

HOUSING DETAILS	Galvanized Steel Approved for installation in insulated ceiling with direct contact to insulating material (except polyurethane) Below-ceiling accessible				
SOCKET	Medium Base Socket (E26)				
JUNCTION BOX	Convenient 24 <sup>3</sup> in 1/2" and 3/4" romex wiring knockouts				
MOUNTING	<p><b>Cutout diameter: <math>\phi</math> 4-1/4" (108 mm)</b></p> <p>Can fit in ceilings of 1/2" (13 mm) up to 1-3/8" (35 mm) thick Requires a 6" (152 mm) clearance beyond the ceiling material No light leakage</p> <p><b>Adjustable Mounting Bars</b></p> <ul style="list-style-type: none"> <li>• 10" (254 mm) to 24" (610 mm) to fit in most ceiling structures</li> <li>• Contains integral nail</li> <li>• Hanger fit onto T-bar spline for quick alignment</li> </ul>				
SOURCE	<p><b>LED PAR16 Lamp</b> 10W MAX</p> <p><b>LED PAR20 Lamp</b> 10W MAX</p>				
COMPATIBLE TRIMS	<p><b>PAR16</b></p> <p>X4001      X4006</p> <p>X4003      X4010</p>	<p><b>PAR20</b></p> <p>X4004      X4007      X4009</p> <p>X4005      X4008      X4010</p>			
VOLTAGE	120V/277V				

# CONTRASTE

# XIC40PAR-L

4" Series - PRIORI




## Insulated Box IC Air Tight PAR20 Housing



### SPECIFICATIONS (CONT'D)

CERTIFICATION	ETL listed for damp locations and wet with shower trim
WARRANTY	1 year limited warranty

### CODIFICATION EXAMPLE



### ORDERING CODES

MODEL	SERIES	SOURCE	VERSION
<b>XIC</b>	<b>40</b>	<b>PAR</b>	<b>-L</b>
<b>XIC</b> Insulated Box Housing	<b>40</b> 4" Series	<b>PAR</b> PAR16 PAR20	<b>-L</b>